Product Datasheet

www.1-light.eu

05 Downlights Fixed>The IP54 Downlights

10125B/W/C



25W LED recessed downlight, IP54. Suitable for bathroom installations.

Complete with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.

IP54 80 CRI CE

Downloads

IES CE

Dimensions

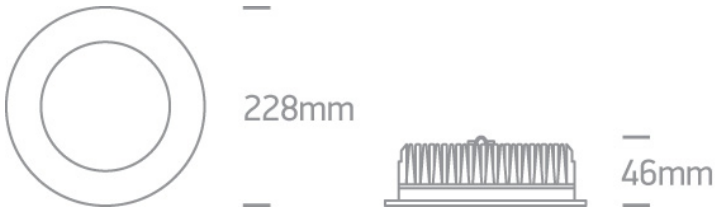

Gallery





Physical Specification

Item Group	05 Downlights Fixed
Family	The IP54 Downlights
Order Code	10125B/W/C
Colour	White
Material	Die Cast
Diffuser Material	Plastic
Shape	Circular

Height	46mm
Diameter	228mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Outdoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included

Fitting + Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	

Fitting

Input Type	Constant Current
Input Current	720mA
Voltage	32V
Safety Class	
Power(Watts)	22,5W
IP Rating	IP54
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Epistar
LED Number	60
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	16,8-26,6W
Power Factor	0,9
Constant Current	Yes
Output	720mA
Voltage Range	24-38V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	70°C
Housing Material	Plastic
Output Terminal	Cable
Brand	0
Protection	Short Circuit and Overload

Illumination Data

Colour Temperature	4000K
Lumen Output	2000lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	90°

Illumination Diagram	

Packing Info

Box Length	26cm
Box Width	26cm
Box Height	7,5cm
Box Weight	1.230kg
Pcs/Carton	10
Barcode	5291889043232
HS Code	9405413990

Certification & Warranty

Warranty	2 years
Weee Directive	Yes

switch to
one light!

