Product Code
55-9769-54-T2

Installation Instructions
3D File
Photometry
Dialux | ULD
Revit (BIM)

Gea LED Signaling ø60mm

LedsC4 Team

Recessed uplighting IP65-IP67 Gea LED Signaling ø60mm LED 1W 4000K Anodised aluminium 23lm

Technical features

Luminaire total power: 1W
Real lumens: 23
Real lm/W: 23
Correlated Colour Temperature (CCT): 4000K
UGR: <=22
Structure material: Aluminium
Structure finish: Anodised aluminium
Diffuser material: Glass
Diffuser finish: Matt
Equipment necessary but not included
Voltage / frequency: 12V AC/DC
Useful life: 50,000h L80B20
Warranty: 5 years
Resistant to marine environments: Yes
Easily recyclable luminaire

IP65-IP67
IK05


RF 850ºC

LED

E A G

50




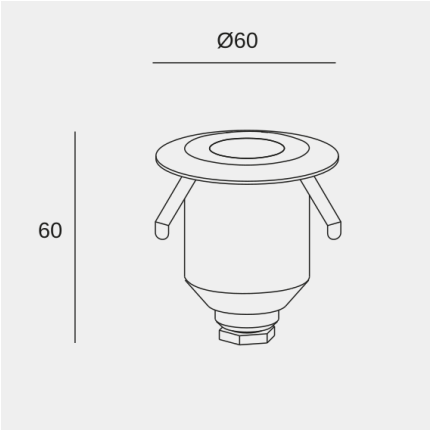

Luminotechnic features

CRI: 80
MacAdam steps: 4
Photobiological risk: RG0
UGR crosswise: 21.0
UGR lengthwise: 20.9

Lampholder	Quantity	Light source power (W)	Correlated Colour Temperature (CCT)
LED	1	1W	4000K

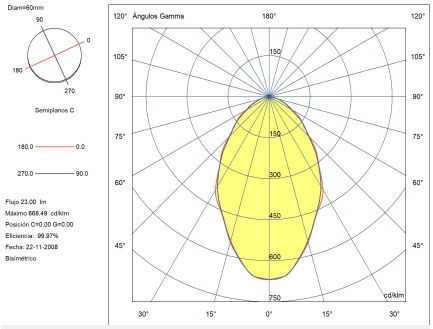

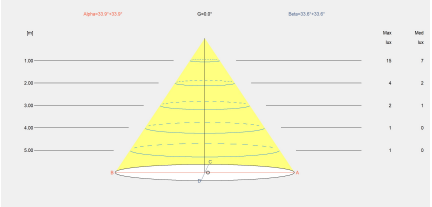


Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

Gea LED Signaling ø60mm

LedsC4 Team

Recessed uplighting IP65-IP67 Gea LED Signaling ø60mm LED 1W 4000K Anodised aluminium 23lm

Logistics

x 20

Net weight (kg): 0.32
Packaged weight (kg): 0.38
Packaging: 75mm x 75mm x 250mm

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

Gea LED Signaling ø60mm

LedsC4 Team

Recessed uplighting IP65-IP67 Gea LED Signaling ø60mm LED 1W 4000K Anodised aluminium 23lm

Accessories included



Coloured interchangeable filters



3700K circular diffuser



Recess case

Optional accessories



71-E112-00-00

IP68 anti-condensation connector with two inlets

Structure material: Technopolymer
Dimensions: 23 x 88 x NA
Net weight (kg): 0.04



71-E122-00-00

IP68 anti-condensation connector with four inlets

Structure material: Technopolymer
Dimensions: 54 x 88 x 28
Net weight (kg): 0.09



71-9199-05-05

IP68 connector with six inlets

Structure material:
Dimensions: NA x NA x NA
Net weight (kg): 0.26

Image reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.

ledsc4@ledsc4.com
LedsC4, Afores s/n 25750 Torà (Lleida) Spain +34 973 468 100

Optional accessories



71-9262-05-05

IP67 connector with three inlets

Structure material:
Dimensions: NA x NA x NA
Net weight (kg): 0.09



71-E510-00-00

Basic Connector Mini IP67 2 inputs 3 poles Ø5.5-7.5mm

Structure material: Nylon
Dimensions: 19 x 55 x NA
Net weight (kg): 0.02



71-E511-00-00

Connector T Basic Mini IP67 3 inputs 3 poles Ø5.5-7.5mm

Structure material: Nylon
Dimensions: 19 x 77 x 52
Net weight (kg): 0.04



71-E512-00-00

Basic Medium Connector IP68 2 inputs 4 poles Ø5.5-11.5mm

Structure material: Nylon
Dimensions: 24 x 71 x NA
Net weight (kg): 0.03



71-E513-00-00

Connector T Basic Medium IP68 3 inputs 3 poles Ø5.5-11.5mm

Structure material: Nylon
Dimensions: 25 x 102 x 65
Net weight (kg): 0.08

71-E100-00-00

IP66 box of 300x200x105mm for housing equipment

Structure material: Polycarbonate + ABS
Dimensions: 225 x 300 x 105
Net weight (kg): 1.17

Image may not match reference. LedsC4 reserves the right to amend any of the product's components. The data related to flux, power and colour temperature may be subject to changes made by the manufacturer.