






Adhara

H2080000GR

LED 1x6W 3000K 830lm

IMÁGENES / IMAGES / IMAGES

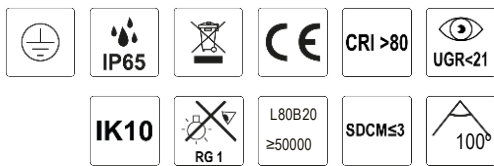

Emisión de luz 1 / Diagrama conico

Separación	Díametro cónico	ESF (%)	ESCR (%)	ESCD (°)	Intensidad luminosa
0,5	1,47 1,92	ESF: 55,7°	ESCR: 52,9°	ESCD: 137	1340
1,0	2,93 3,84	ESF: 55,7°	ESCR: 52,9°	ESCD: 34	311
1,5	4,40 5,77	ESF: 55,7°	ESCR: 52,9°	ESCD: 15	138
2,0	5,86 7,70	ESF: 55,7°	ESCR: 52,9°	ESCD: 8	78
2,5	7,33 9,61	ESF: 55,7°	ESCR: 52,9°	ESCD: 5	50
3,0	8,80 11,53	ESF: 55,7°	ESCR: 52,9°	ESCD: 4	35

Separación: — C0 - C180 (ángulo de dispersión: 185,8°)
— C90 - C270 (ángulo de dispersión: 111,4°)

TIPO	TYPE	TYPE
Baliza	Path Light	Borne lumineuse
ACABADO	FINISH	FINITION
Antracita Texturado	Textured Anthracite	Anthracite Texturé
MATERIAL	MATERIAL	MATIÈRE
Aluminio/Cristal	Aluminium/Glass	Aluminium/Verre
DETALLES	DETAILS	DÉTAILS

DETALLES / DETAILS / DÉTAILS



MEDIDAS / MEASURES

	Length (mm)	Width (mm)	Height (mm)	KG	Gross (Kg)	Net (Kg)
	0	0	0	Weight 1	0,00	0,00
	0	0	0	Weight 2	0,00	0,00