COLORS
Linear Lighting

Version V1.0

Specification

Curve Lighting System

AH5060-15A45/90

www.colorsled.com TEL：+86-755-2923 1888 E-mail：colors@colorsled.com

Version V1.0


AH5060-15A45/90








Features



- Lighting direction : Lighting upward and downward
- Various installation ways: pendant, surface mounted
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

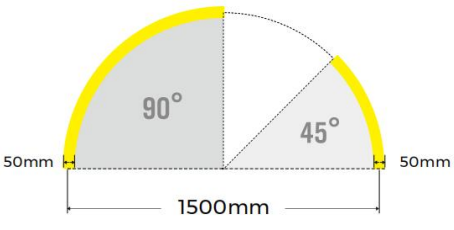


www.colorsled.com TEL：+86-755-2923 1888 E-mail：colors@colorsled.com

Details




Optional Accessories


Picture	Item	Parameter	Model
	①Profile	Profile weight：0.7kg / D1500mm，45° Size：50x60mm，D1500mm，45 50x60mm，D1500mm，90° Material：AL6063-T5 Surface processing: Spray	AH5060-15A45/ 90
	②/③Cover	②35 cover Size：L20000*W32*H3.5mm ③50 cover Size：L20000*W47*H4mm Light transmittance: 60%	②CV-AS3535FD ③CV-AH5060FD
	④End cap	Size：L60*W50*H2mm	EC-AH5060
	⑤Rigid modular DY8160-24V-20mm-15A45	Material:AL,CCT: 2700/3000/3500/4000/5000/6500K；CRI＞80/90； Voltage：24V；Power： 11.6W/pcs；Lumen： 1740Lm/m；Width：20mm；Minimum cutting unit： 16LEDs；	DY8160-24V- 20mm-15A45
	Screw set CL-15	Size：M3.5*50mm	CL-15

Picture	Item	Parameter	Model
	Pendant cable	Steel cable： D1.5*2000\4000mm\maximum load bearing:13Kg	PN-W
	Pendant cable	/	PE-C
	Splicing bar	Size：L25*W32*H8.5mm	EX-25
	Pendant clips	Size：L39.5*W20*H12mm	CP-29

Optical Parameter

AH5060-15A45 module/DY8160-24V-20mm-15A45 light source, frosted diffuser

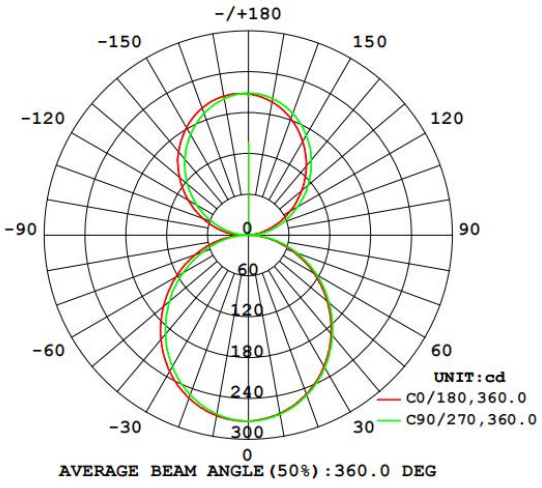

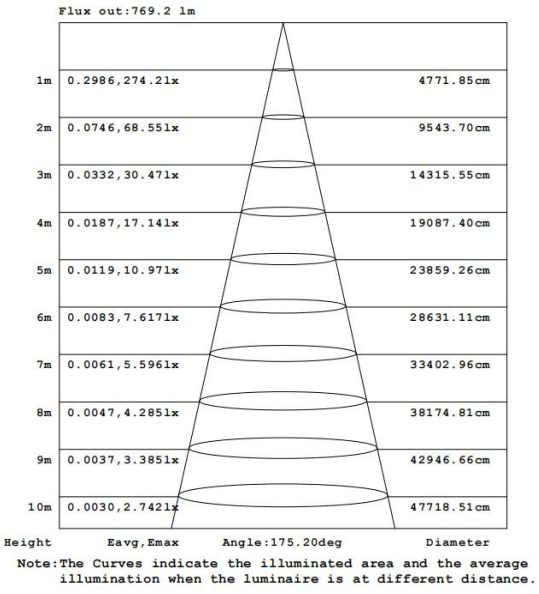

Package



Components	Packaging material	Size(mm)	NW(kg)	GW(kg)	Content
15A45	Hat box	675*320*185mm	8.4	11.4	12pcs/box
15A90	Hat box	1180*515*185mm	21.96	24.96	12pcs/box