PRODUCT DATASHEET

Model: L2T707 L3T707 L4T707

Category: LED Tracklight
Description: 30w LED Tracklight

General Information




Material: Aluminium
Fitting Colors: White/ Black/ Painted Silver
Rotation Angle (degree): 350
Tilting Angle (degree): 90
Track System: Available in single wire, 3 wire, 3 phase
IP Rating: 20
Working Temperature (°C): -5 - +35
Storage Temperature (°C): -20 - +50

Product Dimensions and Cut-out Information

Fitting Length (mm): 165
Diameter (mm): 85
Height (mm): Not Applicable
Cut-out Dimension (mm): Not Applicable

Dimension:

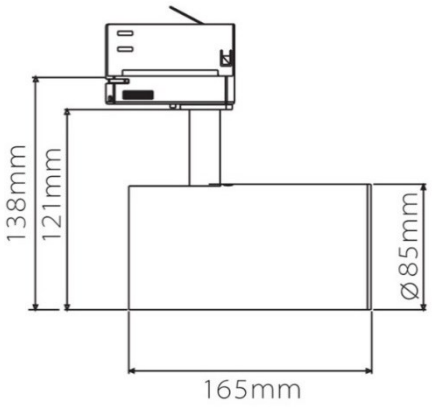

Packing Information

Packaging Type: Individual box
Quantity per carton: 12
CBM per carton: 0.0329
Gross weight per carton (kgs): 13

Lifespan

Lifetime (hours): 30000
Luminous Flux after 50000hours (lm): LM80 Comply

Published on 16.05.2018
©2018 RiO Industrial Limited
All rights reserved

Model: L2T707 L3T707 L4T707

Category: LED Tracklight
Description: 30w LED Tracklight

Light Technical Information

Color Temperature	CRI (Ra)	Gamut Index (GAI)	System Lumen	Lumen per Watt
2700	90	90	3057	90
2700	95	100	2925	86
3000	90	90	3300	97
3000	95	100	3078	91
3000 Vivid White	90	110	3133	92
4000	95	100	3048	90
5000	80	90	Not Applicable	Not Applicable
5000	90	90	3567	105

LED Manufacturer: Luminus
LED Type: COB
LED Model: CXM-18 G3
Optic: Reflector
Beam Angle (°): 17/24/40/60

Electrical Information

System Power (w): 34
Input Voltage (v) & Frequency: 220-240V 50/60Hz
Output Voltage (v): 31-37
Current (mA): 900
Non-Dimmable: RiO Non-dimmable Driver
Power Factor: 0.95
Efficiency (%): 89
Total Harmonic Distortion (%): <20
Ripple (%): <15
Dimmable: Triac Dimming – Upon Request
1-10V Dimming – Upon Request
Dali Dimming – Upon Request

Published on 16.05.2018
©2018 RiO Industrial Limited
All rights reserved