COLORS

Lifting accessories Specification

AS-NNR25VHS1-1000
AS-NNR25VHS1-2500
AS-NNR25VHD1-1000
AS-NNR25VHD1-2500
AS-NNR25LHX-0038
AS-NNR25LHX-0080
AS-NNR25LHX-1000
AS-NNR25LHX-2500
AS-NNR25LHS-0080
AS-NNR25DHX-0038
AS-NNR25DHX-0080
AS-NNR25DHX1-0038



E-mail:colors@colorsled.com
Version：A00
www.colorsled.com

【Features】

· **Material**: aluminum;


· **Operating environment**: indoor;


· **Installation**: screw flat mounting;

· **Warranty**: 6 years.


【Mechanical Parameter】


AS-NNR25VHS1-1000

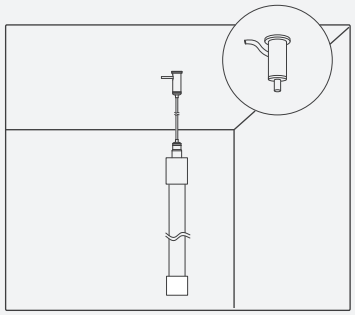

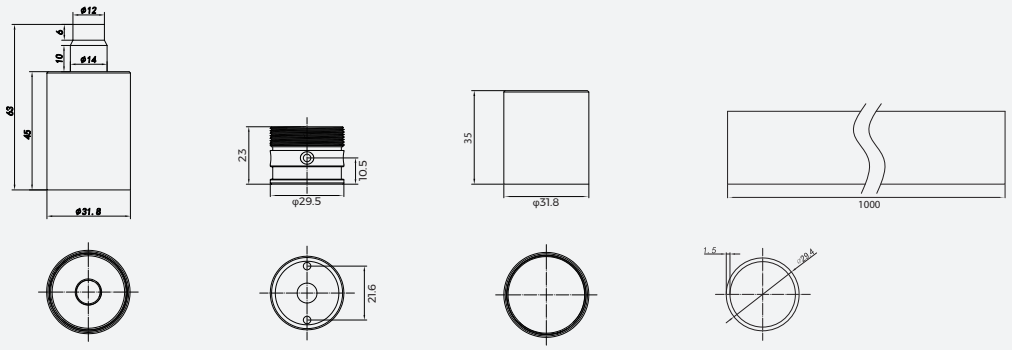



AS-NNR25VHS1-2500

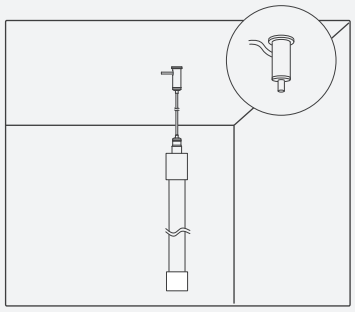

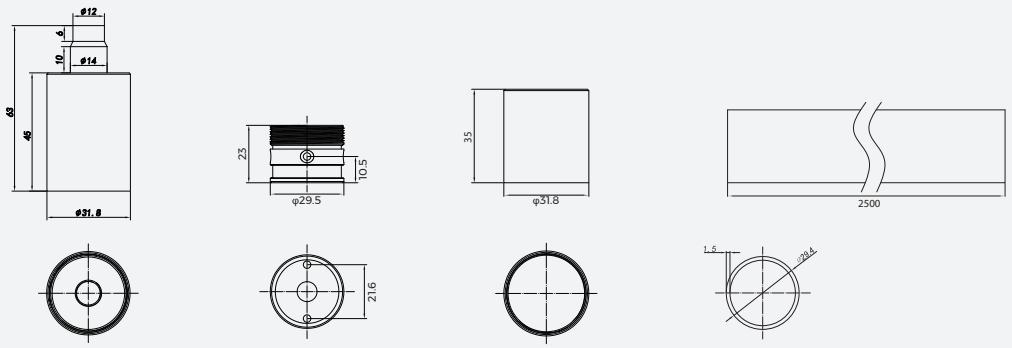


AS-NNR25VHD1-1000

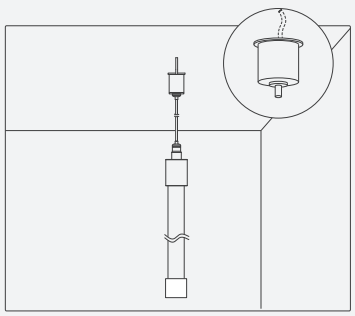


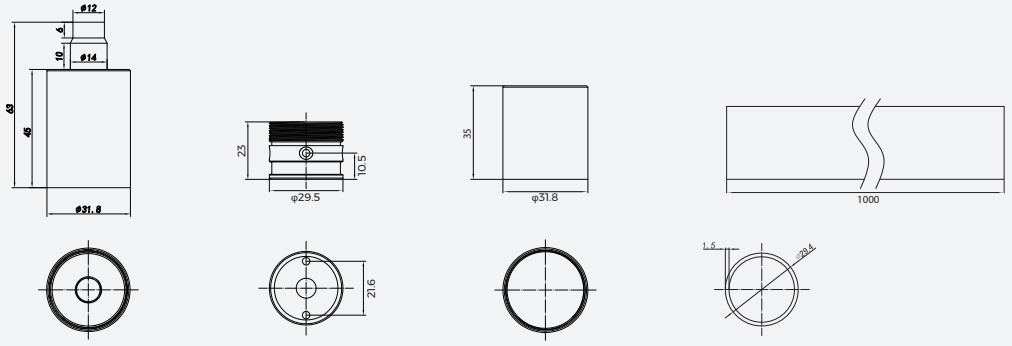


【Mechanical Parameter】


AS-NNR25VHD1-2500

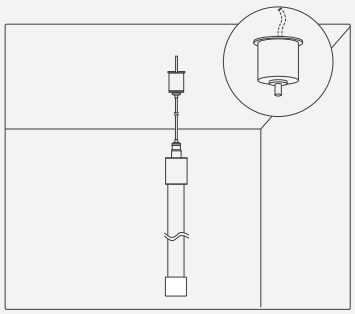

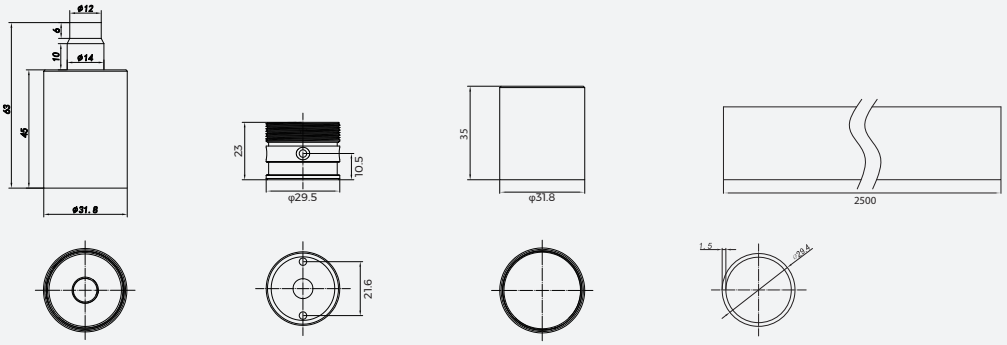



AS-NNR25LHX-0038

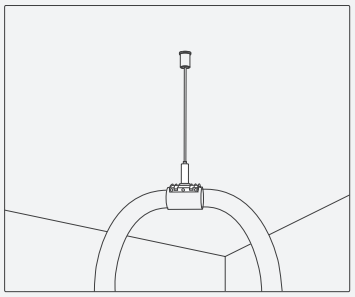

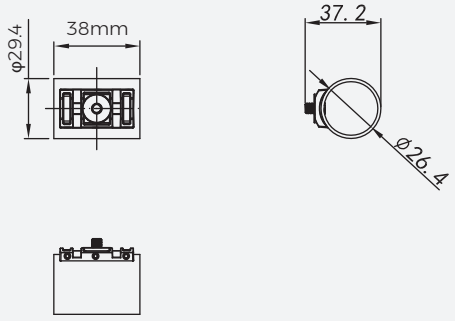



AS-NNR25LHX-0080

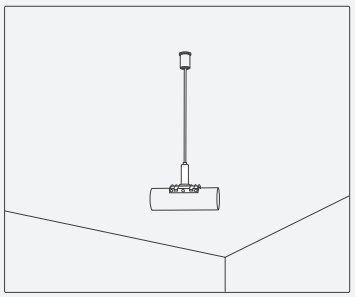

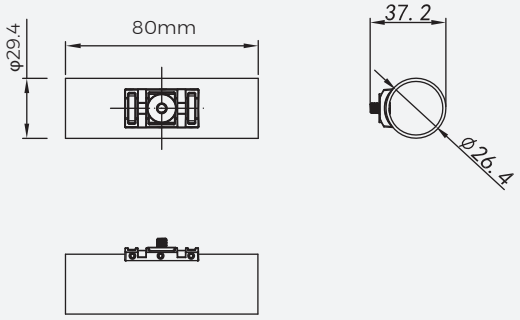


AS-NNR25LHX-1000

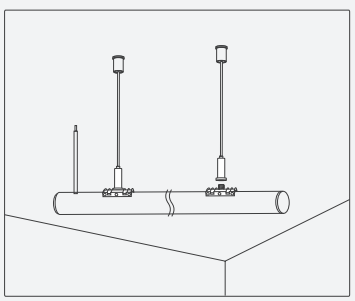


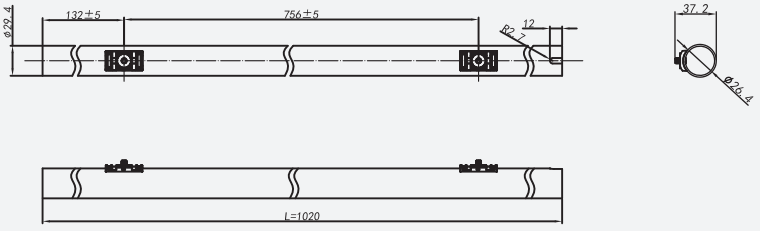


【Mechanical Parameter】


AS-NNR25LHX-2500

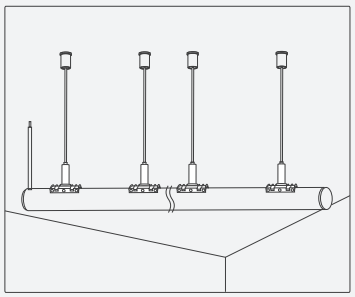

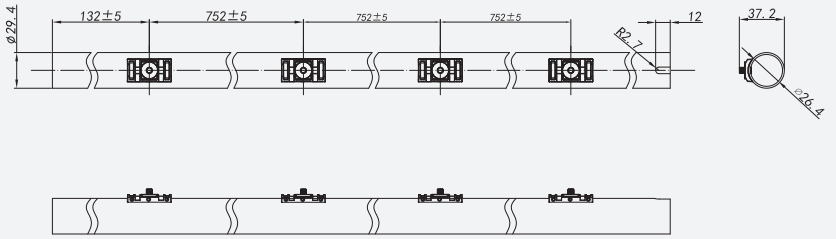



AS-NNR25LHS-0080

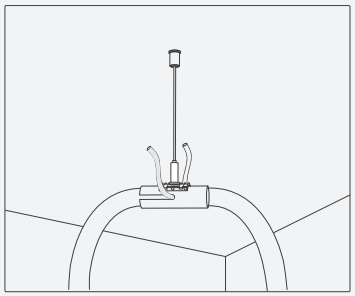

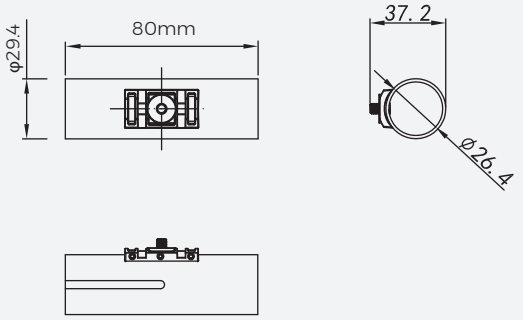



AS-NNR25DHX-0038

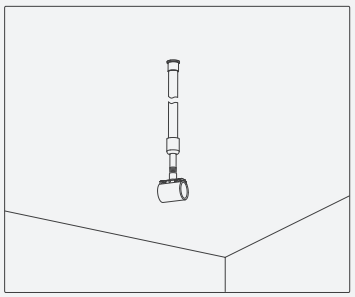

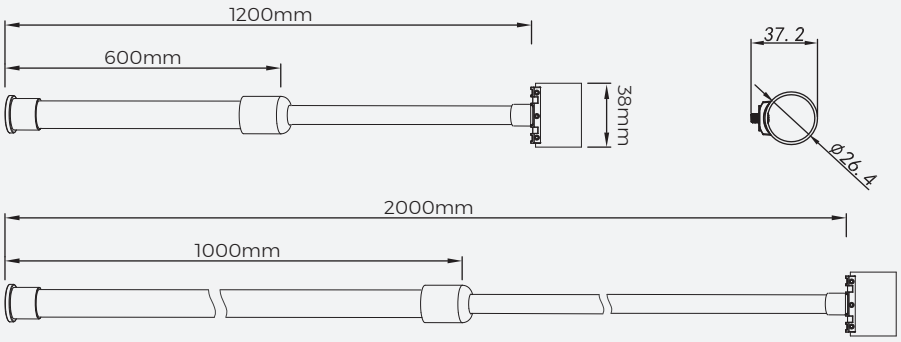


AS-NNR25DHX-0080

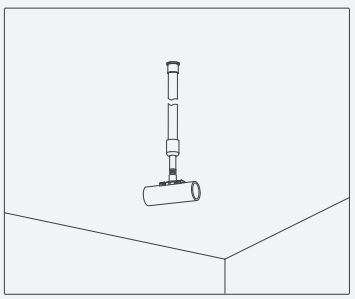


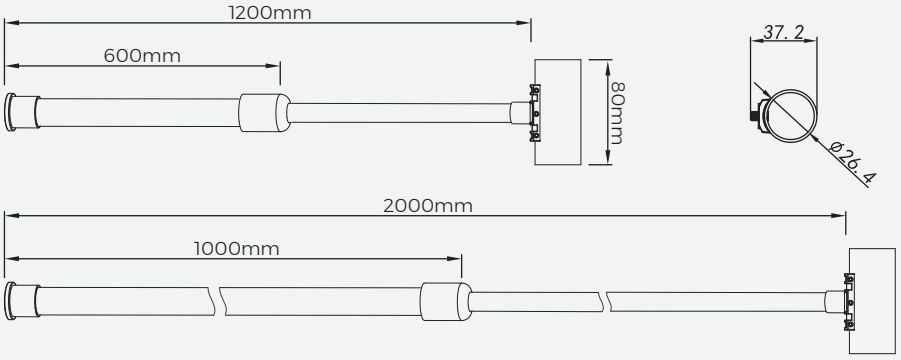


【Mechanical Parameter】

AS-NNR25LHX-2500

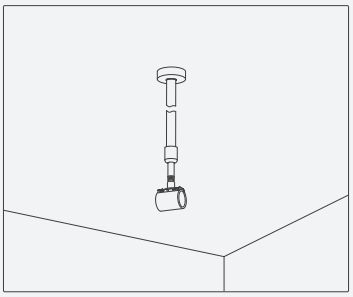

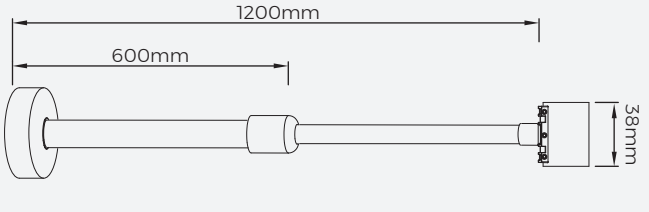




【Specification information】

Describe	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Range of applications
Vertical hanging side outlet Install accessory kit (1m)		AS-NNR25VHS1-1000	16	0.28	4.40	5.29	1285*160*160	NNR25-XXXXBC0100 Round tube：1M；Wire rope:2M For white, monochrome light only
Vertical hanging side outlet Install accessory kit (1m)		AS-NNR25VHS1-2500	16	0.52	8.40	10.12	2580*165*165	NNR25-XXXXBC0250 Round tube：2.5M；Wire rope:2M For white, monochrome light only
Vertical hanging side outlet Install accessory kit (1m)		AS-NNR25VHD1-1000	16	0.31	4.90	5.79	1285*160*160	NNR25-XXXXBC0100 Round tube：1M；Wire rope:2M For white, monochrome light only
Vertical hanging side outlet Install accessory kit (1m)		AS-NNR25VHD1-2500	16	0.55	8.83	10.55	2580*165*165	NNR25-XXXXBC0250; Round tube：2.5M；Wire rope:2M For white, monochrome light only
Horizontal hoisting Install components (38mm)		AS-NNR25LHX-0038	96	0.07	6.75	7.35	365*365*190	NNR25-XXXXBC0100 NNR25-XXXXBC0250 NNR25-XXXXBC0500 Round tube：38mm； Wire rope 2pcs，L：2M； Recommended dosage:1PCS/0.5M
Horizontal hoisting Install components (38mm)		AS-NNR25LHX-0080	48	0.07	3.36	3.96	365*365*190	NNR25-XXXXBC0500 Round tubeL：80mm； Wire rope： 1pcs，L：2M； Recommended dosage:1PCS/0.5M
Horizontal hoisting Install components (1M)		AS-NNR25LHX-1000	16	0.18	2.88	3.48	1180*125*115	NNR25-XXXXBC0100 Round tubeL：1020mm； Wire rope 2pcs，L：2M；

【Specification information】

Describe	Accessories Picture	Order model	Quantity/ case (PCS)	Net weight (kg)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Range of applications
Horizontal hoisting Install components (2.5M)		AS-NNR25LHX-2500	16	0.33	5.28	6.28	2580*165*165	Round tubeL：2520mm； Wire rope 2pcs 2pcs，L：2M；
NNR25 No dark areas accessory		AS-NNR25LHS -0080	48	0.07	3.36	3.96	365*365*190	Suit to NNR25/NNR25P /NNR25BLK (side out wire)
Can be shaped and hoisted Install components		AS-NNR25DHX-0038	15	0.20	3.00	3.62	415*250*230	NNR25P-XXXXBC0500 Round tube L：38mm； escopic rodl L:0.6M Recommended dosage:1PCS/0.5M
Tail splicing piece (80mm)		AS-NNR25DHX-0080	15	0.21	3.15	3.77	415*250*230	NNR25P-XXXXBC0500 Round tubeL：80mm； escopic rodl ：1pcs，L：0.6M； Recommended dosage:1PCS/0.5M
Can be shaped and hoisted Install components		AS-NNR25DHX1-0038	15	0.26	3.9	4.52	415*250*230	NNR25P-XXXXBC0500 Round tube L：38mm； escopic rodl L:0.6M Recommended dosage:1PCS/0.5M

【Precautions】

· Do not use any acid or alkaline adhesive to fix products(including not limited to glass cement,etc).

· After the installation of the lamps and lanterns is completed, do not pull violently, to avoid damage to the lamp.

· Maximum lifting weight of accessories is 4kg(No more than 4 meters).

· Welding of wires and plate must be done in a dry environment.