Profile Track Light System

Visualisation by Iwona Ligęza



PROFILE TINOS LED 7W 10385




PROFILE TINOS LED 10W 10373





PROFILE TINOS LED 20W 10383




PROFILE TINOS LED 30W 10375

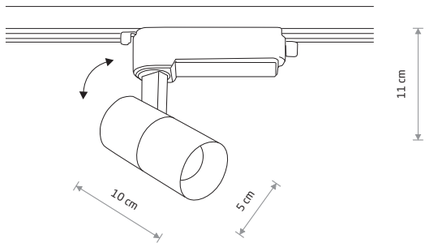

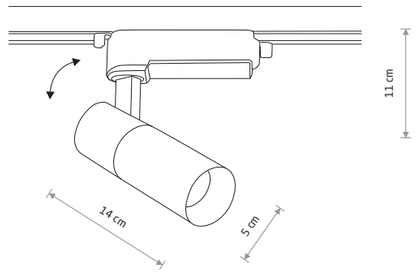

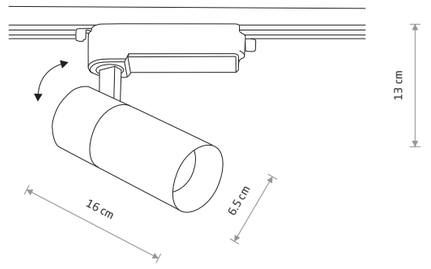

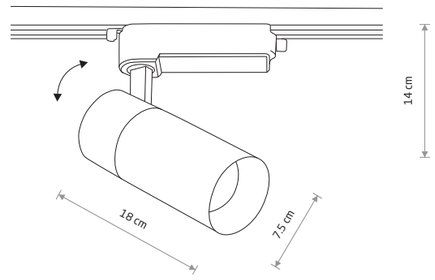

PROFILE TINOS LED 7W

painted aluminum, plastic

☐ 10372 3000K ☐ 10376 4000K

■ 10381 3000K ■ 10385 4000K

PROFILE TINOS LED 10W

painted aluminum, plastic

☐ 10373 3000K ☐ 10377 4000K

■ 10382 3000K ■ 10386 4000K

PROFILE TINOS LED 20W

painted aluminum, plastic

☐ 10374 3000K ☐ 10378 4000K

■ 10383 3000K ■ 10387 4000K

PROFILE TINOS LED 30W

painted aluminum, plastic

☐ 10375 3000K ☐ 10380 4000K

■ 10384 3000K ■ 10388 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10372	7W LED	3000K	550 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10376	7W LED	4000K	570 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10381	7W LED	3000K	530 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10385	7W LED	4000K	550 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10373	10W LED	3000K	950 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10377	10W LED	4000K	1000 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10382	10W LED	3000K	880 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10386	10W LED	4000K	980 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
10374	20W LED	3000K	1800 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10378	20W LED	4000K	2000 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10383	20W LED	3000K	1700 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10387	20W LED	4000K	1900 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10375	30W LED	3000K	2800 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10380	30W LED	4000K	3000 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10384	30W LED	3000K	2600 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h
10388	30W LED	4000K	2900 lm	36 °	>80	~220-230 V, 50/60 Hz	⧈	>0.9	IP20	30000h


☐ WHITE ■ BLACK

☐ WHITE ■ BLACK

Nowodvorski LIGHTING



PROFILE IRIS LED 7W 8996



PROFILE IRIS LED 7W

painted aluminum, plastic PC


- 8995 3000K
- 8997 4000K
- 8996 3000K
- 8998 4000K



PROFILE IRIS LED 20W 9005




PROFILE IRIS LED 12W 9002



PROFILE IRIS LED 12W

painted aluminum, plastic PC

- 9000 3000K
- 9002 4000K
- 9001 3000K
- 9003 4000K



PROFILE IRIS LED 20W

painted aluminum, plastic PC

- 9004 3000K
- 9006 4000K
- 9005 3000K
- 9007 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
8995	7W LED	3000K	550 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8996	7W LED	3000K	530 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8997	7W LED	4000K	560 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
8998	7W LED	4000K	550 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9000	12W LED	3000K	1000 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9001	12W LED	3000K	950 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9002	12W LED	4000K	1100 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9003	12W LED	4000K	1000 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection	Lifetime
9004	20W LED	3000K	1500 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9005	20W LED	3000K	1400 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9006	20W LED	4000K	1600 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h
9007	20W LED	4000K	1500 lm	30 °	>80	~220-230 V, 50/60 Hz		>0.5	IP20	30000h

WHITE BLACK

WHITE BLACK



PROFILE MIKE 7661



PROFILE MIKE

painted aluminum, plastic

■ 7661

1xGU10 R50, max 15W only LED




PROFILE ZOOM LED 7625





PROFILE INDIA 7657




PROFILE INDIA


painted aluminum, plastic

■ 7657

1xGU10 R50, max 15W only LED



BEAM CONE

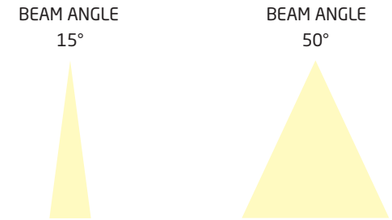

PROFILE ZOOM LED


painted aluminum, plastic

□ 7623 3000K □ 7624 4000K

■ 7625 3000K ■ 7626 4000K



PROFILE FOCUS 7621



PROFILE FOCUS LED

painted aluminum, plastic

□ 7618 3000K □ 7620 4000K

■ 7621 3000K ■ 7622 4000K


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Input	Safety type	Power factor	Ingress protection
7618	10W LED	3000K	600 lm	36°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7620	10W LED	4000K	600 lm	36°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7621	10W LED	3000K	600 lm	36°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7622	10W LED	4000K	600 lm	36°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7623	9W LED	3000K	600 lm	15-50°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7624	9W LED	4000K	660 lm	15-50°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7625	9W LED	3000K	600 lm	15-50°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20
7626	9W LED	4000K	660 lm	15-50°	>90	~220-230 V, 50/60 Hz	⧈	>0.9	IP20

□ WHITE ■ BLACK

□ WHITE ■ BLACK



PROFILE EYE SUPER C 9244



PROFILE EYE SUPER C

painted steel, plastic PC

☐ 9245 ■ 9244


1xGU10 R50, max 10W only LED

PROFILE BIT PLUS

painted steel, plastic PC

■ 9018

1xGU10 ES111, max 15W only LED






PROFILE BIT PLUS 9018



PROFILE EYE SUPER A 9325



PROFILE EYE SUPER A

painted steel, plastic PC

☐ 9324 ■ 9325


1xGU10 R50, max 10W only LED

PROFILE BIT

painted steel, plastic PC


■ 8823

1xGU10 ES111, max 15W only LED






PROFILE BIT 8823

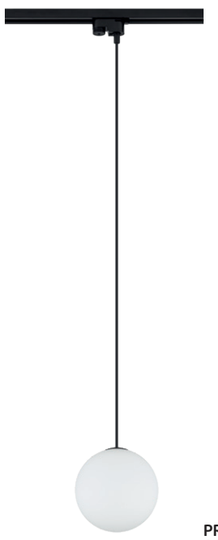

PROFILE SNOWBALL
11297

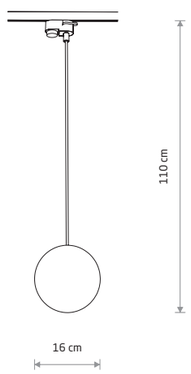

PROFILE SNOWBALL

plastic PC, glass, painted steel

■ 11297

1xG9, max 12W only LED

BULB LED G9, 4W


☐ 7503 3000K ☐ 7504 4000K

PROFILE EYE

painted steel, plastic PC

☐ 9337 ■ 9338

1xGU10 R50, max 10W only LED






PROFILE EYE 9338



PROFILE EYE SPOT 9322



PROFILE EYE SPOT

painted steel, plastic PC, chrome

9321 9322

1xGU10 R50, max 10W only LED

PROFILE SNOWBALL


plastic PC, glass, painted steel

11298

1xG9, max 12W only LED

BULB LED G9, 4W

7503 3000K 7504 4000K






PROFILE SNOWBALL
11298



PROFILE MONO 7583



PROFILE MONO

painted steel, plastic ABS

7581 7582

7584 7585

1xGU10 R50, max 10W only LED

solid brass, painted steel, plastic ABS

7583


1xGU10 R50, max 10W only LED

PROFILE VESPA

painted steel, plastic PC, chrome

8824 8825

1xGU10 ES111, max 15W only LED






PROFILE VESPA 8825



PROFILE PUCK 10358



PROFILE PUCK

painted steel, plastic PC


10358

1xGX53, max 12W only LED

CAMELEON ADAPTER PROFILE

plastic

8360 8361





CAMELEON ADAPTER PROFILE
8360


BLACK P013 RAL 9005 GOLD P021 BRASS WHITE P004 RAL 9003

Scan QR code to get know
Cameleon System offer

WHITE P004 RAL 9003 BLACK P013 RAL 9005

Nowodvorski LIGHTING

PROFILE TRACK LIGHT SYSTEM



1 PROFILE TRACK 1 M
painted aluminum

☐ 9450 ■ 9448

2 PROFILE TRACK 2 M
painted aluminum

☐ 9451 ■ 9452


Schemat zasilania / Power supply circuit diagram


Zalecany dystans pomiędzy mocowaniami max. 1000 mm
Maksymalna długość jednego obwodu systemu szynoprzewodowego PROFILE - 20 m, a maksymalne obciążenie elektryczne - 1500W
System szynoprzewodowy należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.

The recommended fastening distance is max. 1000 mm
The maximum length of one circuit of PROFILE track light system -20 m, and the maximum circuit power load - 1500W
The track light system should be evenly electrically loaded and the fittings should be evenly placed along its length.

☐ WHITE ■ BLACK

Sposoby montażu / Installation methods





3 PROFILE POWER SUPPLY KIT
painted steel

☐ 9237 ■ 9238


4 PROFILE SUSPENSION KIT
painted steel, plastic

☐ 9461 ■ 9460

1. Zwieszenie na linkach stalowych
1. Suspended on steel wires





2. Montaż bezpośredni
2. Surface mounting

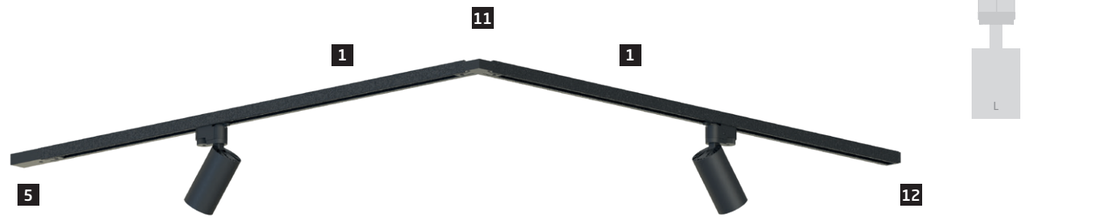

☐ WHITE ■ BLACK

PROFILE TRACK LIGHT SYSTEM

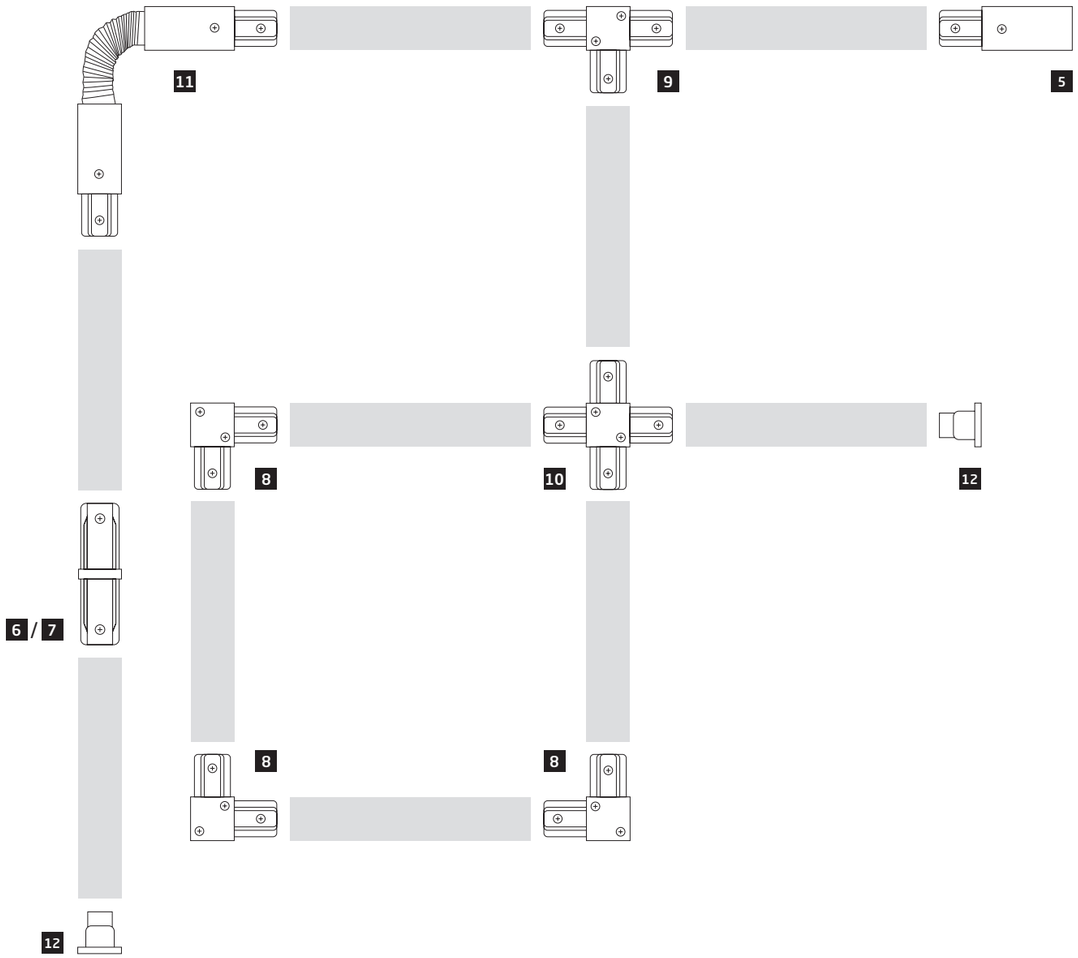




5 PROFILE POWER END CAP

plastic PC, steel, copper


☐ 9462 ■ 9463



6 PROFILE POWER STRAIGHT CONNECTOR

plastic PC, steel


☐ 10225 ■ 10226



7 PROFILE STRAIGHT CONNECTOR

plastic PC, steel, copper


☐ 9454 ■ 9453



8 PROFILE L CONNECTOR

plastic PC, steel, copper


☐ 9456 ■ 9455



9 PROFILE T CONNECTOR

plastic PC, steel, copper


☐ 9187 ■ 9186



10 PROFILE X CONNECTOR

plastic PC, steel, copper


☐ 9190 ■ 9188

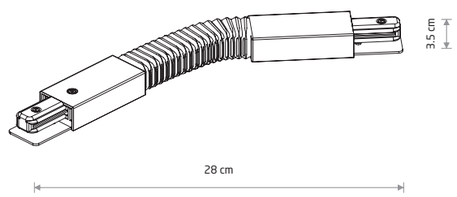

11 PROFILE FLEX CONNECTOR

plastic PC, steel, copper

☐ 8382 ■ 8383



12 PROFILE DEAD END CAP

plastic PC


☐ 9457 ■ 9458

☐ WHITE ■ BLACK

☐ WHITE ■ BLACK

Nowodvorski LIGHTING

PROFILE RECESSED TRACK LIGHT SYSTEM



1 PROFILE RECESSED TRACK 1 METER

painted aluminum

☐ 9012 ■ 9013


2 PROFILE RECESSED TRACK 2 METERS

painted aluminum

☐ 9014 ■ 9015


Sposób montażu / Installation method


1. Montaż podtynkowy
1. Recessed mounting

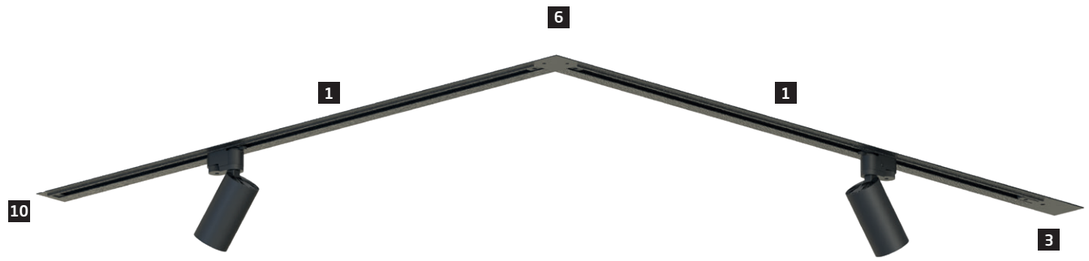

Schemat zasilania / Power supply circuit diagram

1 faza, 1 obwód
1-phase, 1-circuit

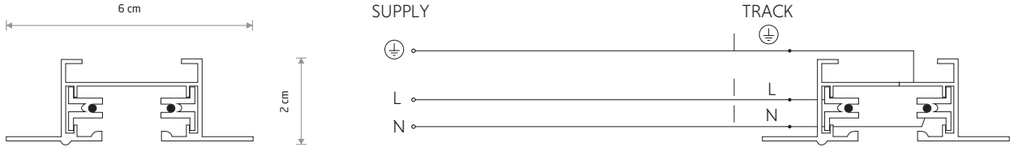

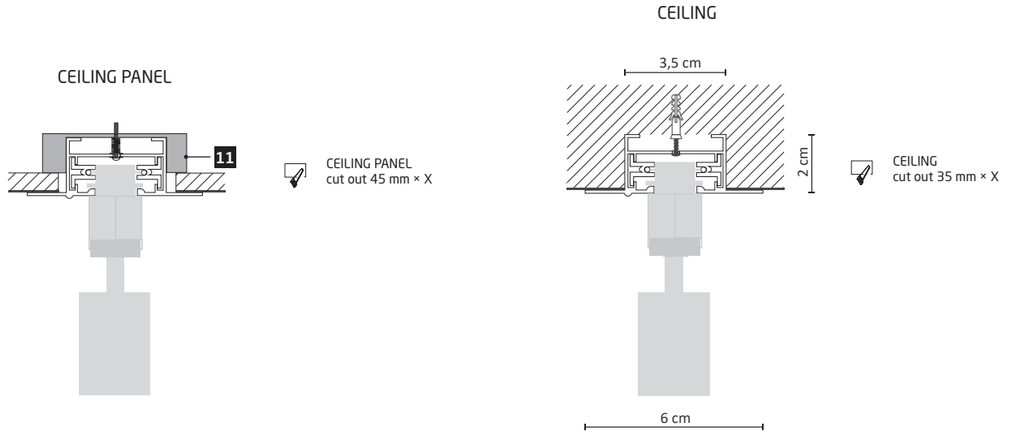



Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość jednego obwodu systemu szynoprzewodowego PROFILE - 20 m, a maksymalne obciążenie elektryczne - 1500W.
System szynoprzewodowy należy rownomiernie obciążyć elektrycznie oraz rownomiernie rozmieścić oprawy na jego długości.

The recommended fastening distance is max. 1000 mm.
The maximum length of one circuit of track light system PROFILE -20 m, and the maximum circuit power load - 1500W.
The track light system should be evenly electrically loaded and the fittings should be evenly placed along its length.

☐ WHITE ■ BLACK

PROFILE RECESSED TRACK LIGHTS SYSTEM

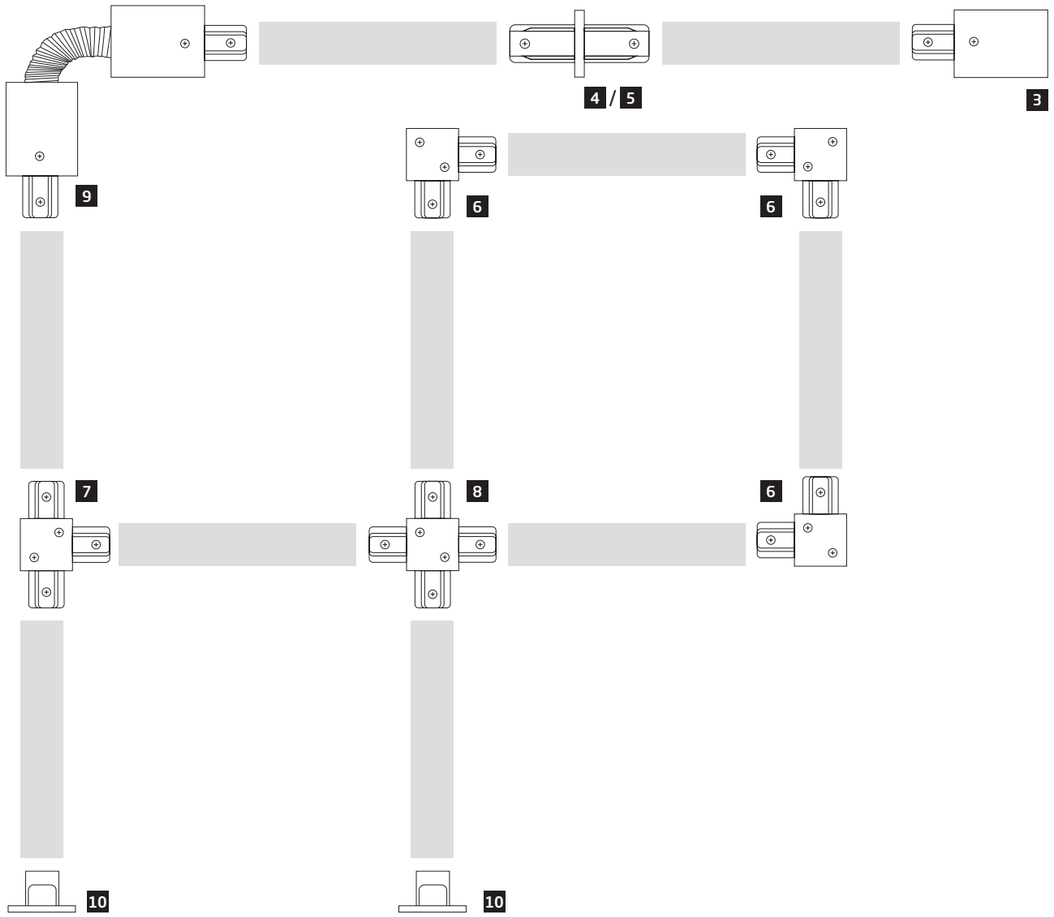




3 PROFILE RECESSED POWER END CAP

plastic PC, steel, copper


☐ 8972 ■ 8973



4 PROFILE RECESSED POWER STRAIGHT CONNECTOR

plastic PC, steel


☐ 10227 ■ 10228



5 PROFILE RECESSED STRAIGHT CONNECTOR

plastic PC, steel, copper


☐ 8967 ■ 8968



6 PROFILE RECESSED L CONNECTOR

plastic PC, steel, copper


☐ 8970 ■ 8971



7 PROFILE RECESSED T CONNECTOR

plastic PC, steel, copper


☐ 8834 ■ 8835



8 PROFILE RECESSED X CONNECTOR

plastic PC, steel, copper


☐ 8836 ■ 8837

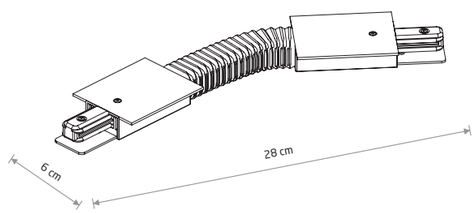

9 PROFILE RECESSED FLEX CONNECTOR

plastic PC, steel, copper


☐ 8384 ■ 8385



10 PROFILE RECESSED DEAD END CAP

plastic PC

☐ 8974 ■ 8975



11 PROFILE RECESSED FIXING SET

steel

▥ 8805

☐ WHITE ■ BLACK

▥ SILVER ☐ WHITE ■ BLACK

Nowodvorski LIGHTING