UT-LVM Track Light System 48V


Visualisation by Iwona Ligęza




UT-LVM FOCUS LED 18W 11306



UT-LVM FOCUS LED 12W 11305

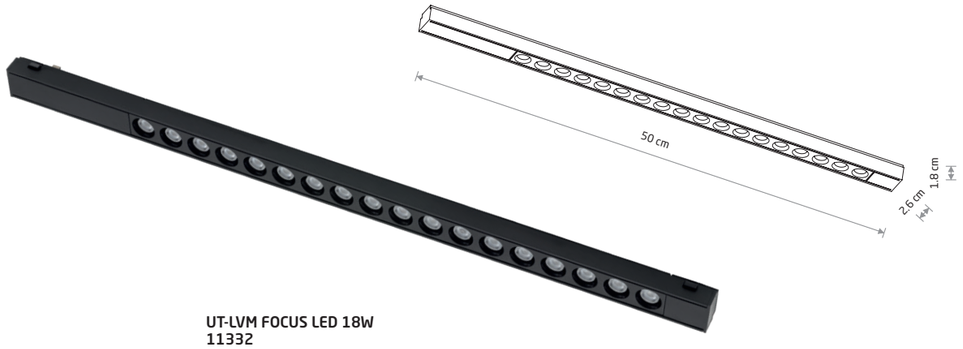

UT-LVM FOCUS LED 18W
11332

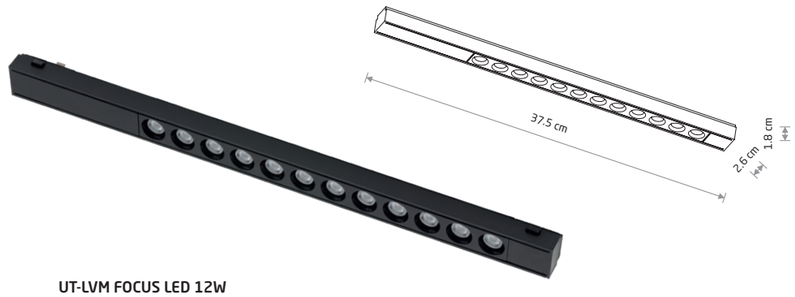

UT-LVM FOCUS LED 12W
11331

UT-LVM FOCUS LED 18W

aluminum

■ 11306 3000K ■ 11332 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11306	18W LED	3000K	1500 lm	30 °	≥90	48V	III	IP20	40000h
11332	18W LED	4000K	1500 lm	30 °	≥90	48V	III	IP20	40000h

■ BLACK

UT-LVM FOCUS LED 12W


aluminum

■ 11305 3000K ■ 11331 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11305	12W LED	3000K	1000 lm	30 °	≥90	48V	III	IP20	40000h
11331	12W LED	4000K	1000 lm	30 °	≥90	48V	III	IP20	40000h

■ BLACK



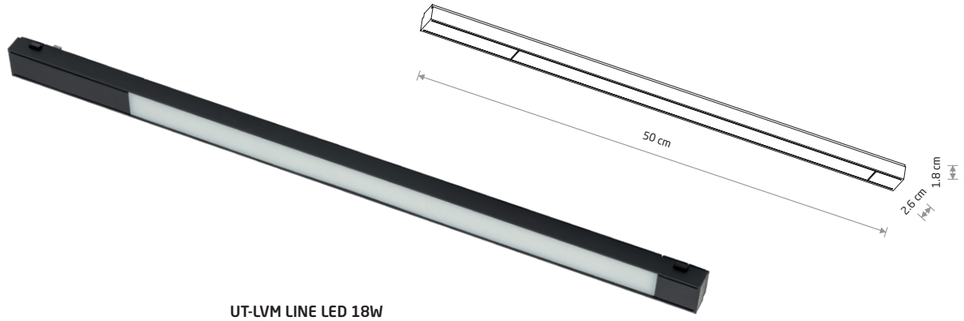

UT-LVM LINE LED 18W
11334

UT-LVM LINE LED 18W


aluminum

■ 11308 3000K ■ 11334 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Power factor	Lifetime
11308	18W LED	3000K	1500 lm	110 °	≥90	48V		IP20	40000h
11334	18W LED	4000K	1500 lm	110 °	≥90	48V		IP20	40000h

BLACK



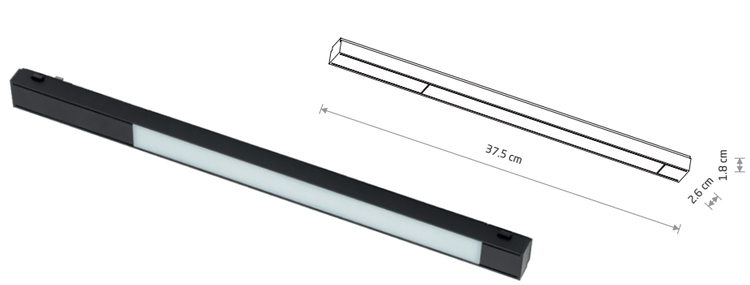

UT-LVM LINE LED 12W
11333

UT-LVM LINE LED 12W

aluminum

■ 11307 3000K ■ 11333 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Power factor	Lifetime
11307	12W LED	3000K	1000 lm	110 °	≥90	48V		IP20	40000h
11333	12W LED	4000K	1000 lm	110 °	≥90	48V		IP20	40000h


BLACK







UT-LVM FOCUS OUT LED 12W 11338



UT-LVM FOCUS OUT LED 12W

aluminum


■ 11313 3000K ■ 11338 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11313	12W LED	3000K	1000 lm	30 °	≥90	48V	III	IP20	40000h
11338	12W LED	4000K	1000 lm	30 °	≥90	48V	III	IP20	40000h

■ BLACK



UT-LVM FOCUS OUT LED 6W 11337



UT-LVM FOCUS OUT LED 6W

aluminum

■ 11312 3000K ■ 11337 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11312	6W LED	3000K	500 lm	30 °	≥90	48V	III	IP20	40000h
11337	6W LED	4000K	500 lm	30 °	≥90	48V	III	IP20	40000h


■ BLACK







UT-LVM FOCUS SWING LED 12W
11336



UT-LVM FOCUS SWING LED 12W

aluminum


■ 11311 3000K ■ 11336 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11311	12W LED	3000K	1000 lm	30°	≥90	48V		IP20	40000h
11336	12W LED	4000K	1000 lm	30°	≥90	48V		IP20	40000h

■ BLACK



UT-LVM FOCUS SWING LED 6W
11335



UT-LVM FOCUS SWING LED 6W

aluminum

■ 11310 3000K ■ 11335 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11310	6W LED	3000K	500 lm	30°	≥90	48V		IP20	40000h
11335	6W LED	4000K	500 lm	30°	≥90	48V		IP20	40000h

■ BLACK




UT-LVM SPOT LED 5W 11314



UT-LVM SPOT LED 9W 11315



UT-LVM SPOT LED 5W
11340



UT-LVM SPOT LED 5W

aluminum


■ 11314 3000K ■ 11340 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11314	5W LED	3000K	450 lm	36 °	≥90	48V		IP20	40000h
11340	5W LED	4000K	450 lm	36 °	≥90	48V		IP20	40000h

■ BLACK



UT-LVM SPOT LED 9W
11341



UT-LVM SPOT LED 9W

aluminum

■ 11315 3000K ■ 11341 4000K


Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11315	9W LED	3000K	850 lm	36 °	≥90	48V		IP20	40000h
11341	9W LED	4000K	850 lm	36 °	≥90	48V		IP20	40000h

■ BLACK





UT-LVM SPOT LED 12W
11342




UT-LVM SPOT LED 12W

aluminum

■ 11316 3000K ■ 11342 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11316	12W LED	3000K	1200 lm	36°	≥90	48V	III	IP20	40000h
11342	12W LED	4000K	1200 lm	36°	≥90	48V	III	IP20	40000h

■ BLACK

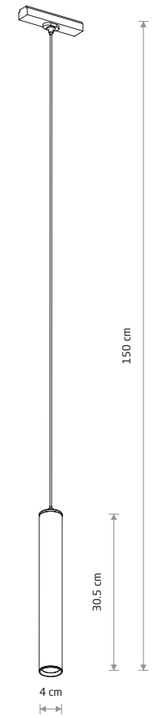

UT-LVM ROLLER LED 10W

aluminum

■ 11317 3000K ■ 11343 4000K

Item No.	Power	Colour temp.	Luminous flux	Beam angle	Colour Rendering Index (CRI)	Voltage DC	Safety type	Ingress protection	Lifetime
11317	10W LED	3000K	1000 lm	36°	≥90	48V	III	IP20	40000h
11343	10W LED	4000K	1000 lm	36°	≥90	48V	III	IP20	40000h

■ BLACK



SPOSOBY MONTAŻU / INSTALLATION METHODS

1



SURFACE CONNECTION

2




SURFACE CONNECTION


3




SURFACE CONNECTION



UT-LVM TRACK




UT-LVM TRACK



UT-LVM TRACK




UT-LVM TRACK




UT-LVM VERTICAL CONNECTOR




UT-LVM TRACK




UT-LVM VERTICAL CONNECTOR




UT-LVM L CONNECTOR




UT-LVM VERTICAL CONNECTOR



UT-LVM END CAP




UT-LVM END CAP



UT-LVM END CAP

UT-LVM TRACK LIGHT SYSTEM 48V

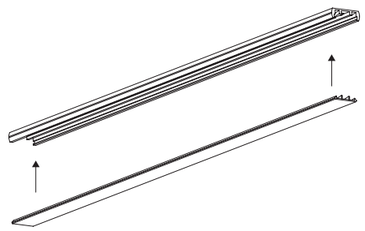

Zestaw zawiera listwę maskującą
Set includes a masking strip

1 UT-LVM TRACK 1M

aluminum


■ 11320


2 UT-LVM TRACK 2M

aluminum

■ 11318

Schemat zasilania / Power supply circuit diagram

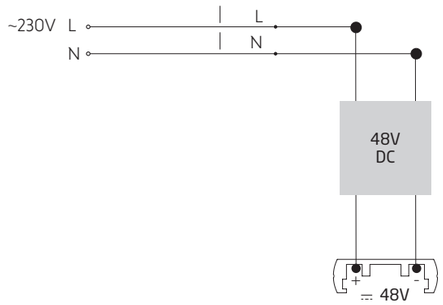



System szynoprzewodowy (UT-LVM) należy równomiernie obciążyć elektrycznie oraz równomiernie rozmieścić oprawy na jego długości.
Zalecany dystans pomiędzy mocowaniami max. 1000 mm.
Maksymalna długość systemu szynoprzewodowego z jednego źródła zasilania - 20 m.


The track light system (UT-LVM) should be evenly electrically loaded and the fittings should be evenly placed along its length.
The recommended fastening distance is max. 1000 mm.
Maximum length of track light system with a single power source is 20 m.

■ BLACK


SPOSOBY MONTAŻU / INSTALLATION METHODS

1. Montaż bezpośredni
1. Surface mounting







3 UT-LVM 48V, 100W INSIDE POWER SUPPLY
aluminum
■ 11328

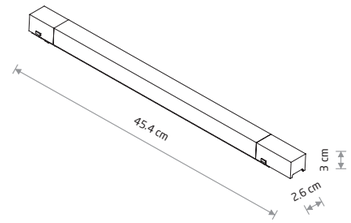


4 UT-LVM 48V, 200W INSIDE POWER SUPPLY
aluminum
■ 11330




5 UT-LVM OUTSIDE POWER SUPPLY CONDUCTIVE MODULE
plastic, copper
■ 11321




6 UT-LVM VERTICAL CONNECTOR
plastic, copper
■ 11326



7 UT-LVM STRAIGHT CONNECTOR
plastic, copper
■ 11322



8 UT-LVM L CONNECTOR
plastic, copper
■ 11325



9 UT-LVM END CAP
plastic
■ 11327

■ BLACK