NORMALUX

ARQUE

Technical datasheet

Emergency Lighting

Ref. QVAL-250Li


UNE 60598-2-22
230V 50/60HZ




Emergency Lighting: ARQUE. Reference: QVAL-250Li, manufactured by Normalux. Lumens 250 lm. Autonomy (h) 1h. Operating mode: Mantained - Non Maintained. Installation: Surface Mounting. Light source: Led. Battery of: LiFePO4 3.2V/1500mAh. IP: 44. IK: 09. Version: Self-test. Color: White. Casing: Polycarbonate. Voltage: 230V 50/60Hz. Dimensions (mm): 97 x 97 x 47 mm. Manufactured according UNE 60598-2-22 regulations. Compatible with S-TE remote control.

Lumens	250 lm
Color temperatures (K)	5700
Light source	Led
Autonomy (h)	1h
Battery	LiFePO4 3.2V/1500mAh
Charging	max. 24 h
Power (W)	4W
Operating mode	Mantained - Non Maintained
Class	II
IP	44
IK	09
Operating temperature (ºC)	5 to 35
Remote control	Yes

Dimensions (mm):

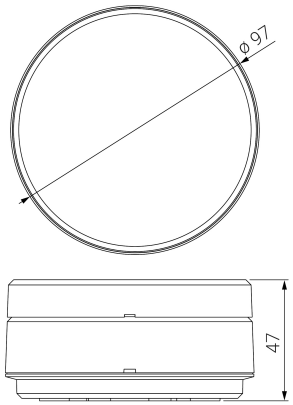

Photometric data:

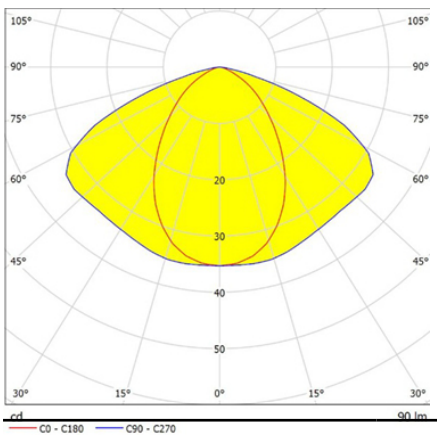

Parque tecnológico de Asturias. Calle Ablanal 1, 33428 Llanera (Asturias), Spain
T. +34 985 267 100 F. +34 985 266 992
normagrup@normagrup.com
www.normalux.com

Normagrup
Sense of Technology

July 20, 2026, 12:56:40