
COLORS®
Linear Lighting

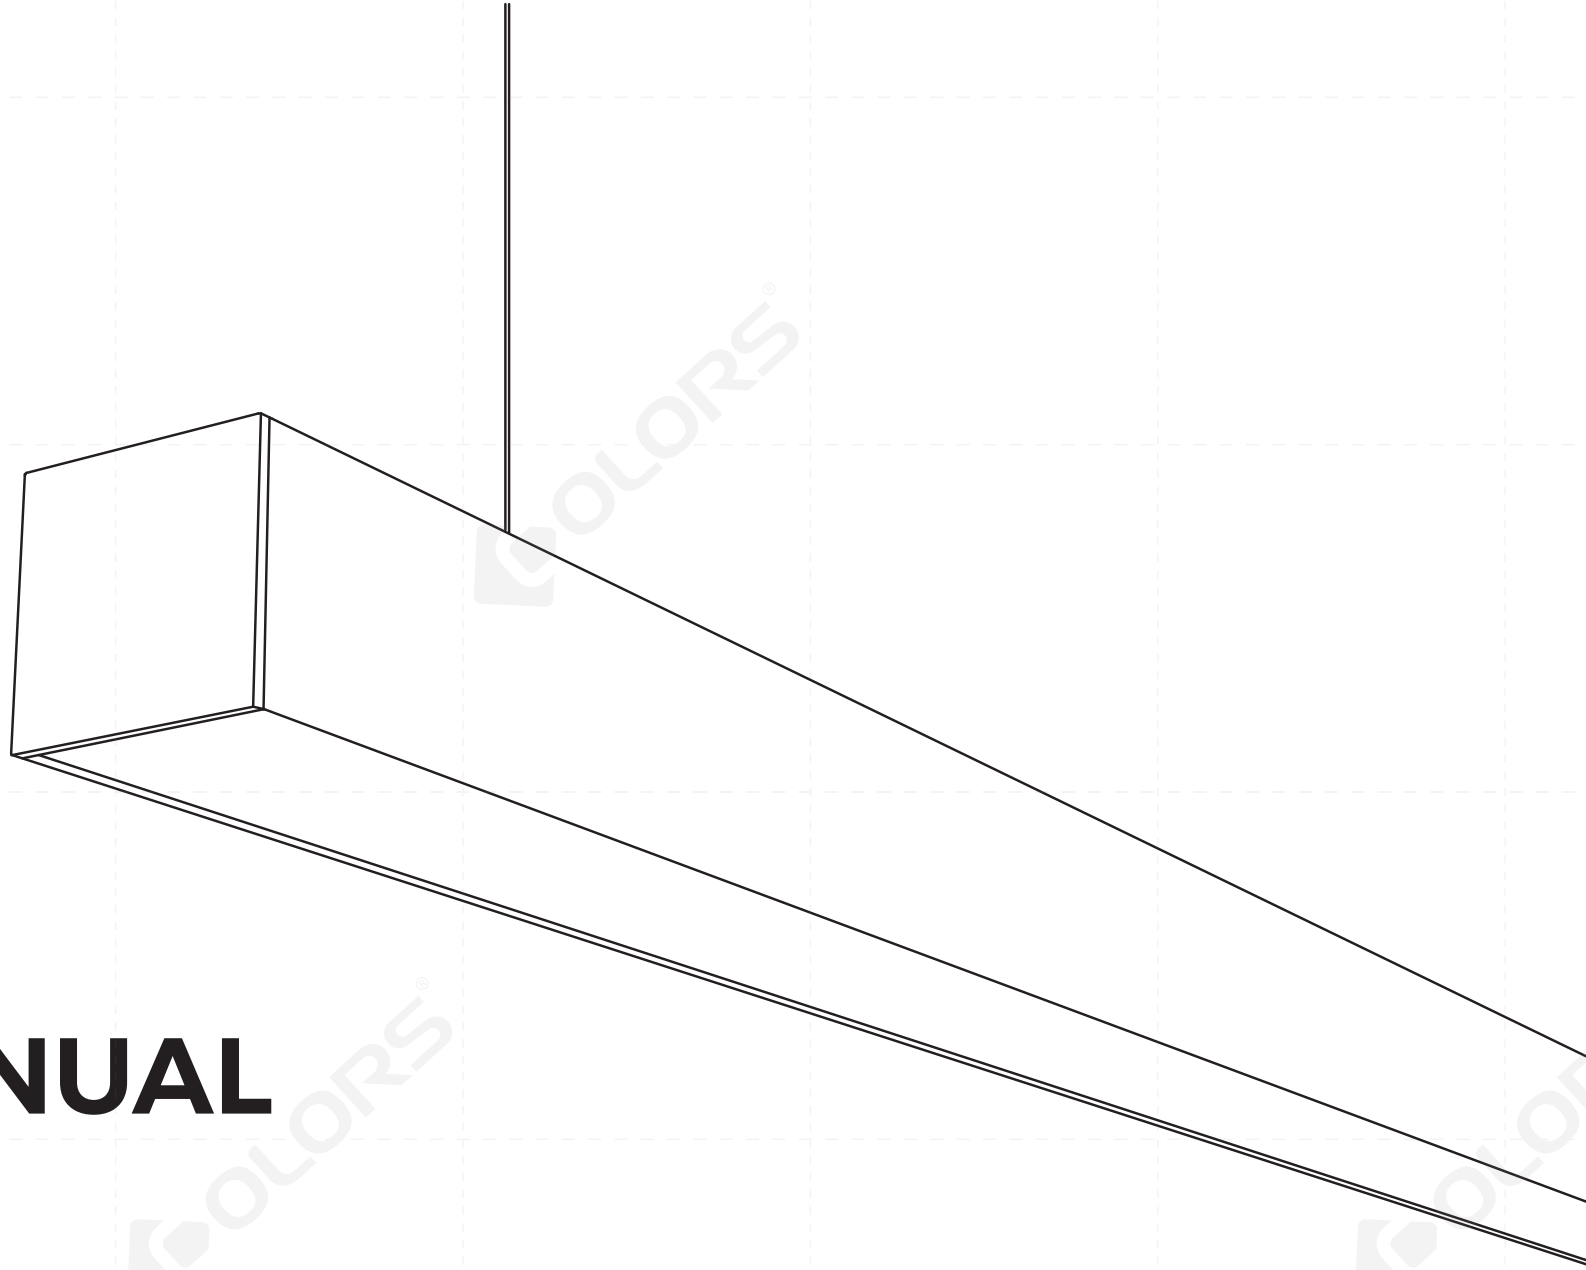


USER MANUAL

SLIM V2.0


Please read the manual carefully before installation and application, and use the product in the correct way.
Instructions on accessories are included in the manual.
Please properly maintain the manual after reading and understanding it for convenient reference by all users of the product in the future.

Pendant: LH25 series


1 Measured the distance “L” between the two pendant cables, drill two ϕ5mm holes in the corresponding positions on the ceiling, install the screw stopper into the hole.

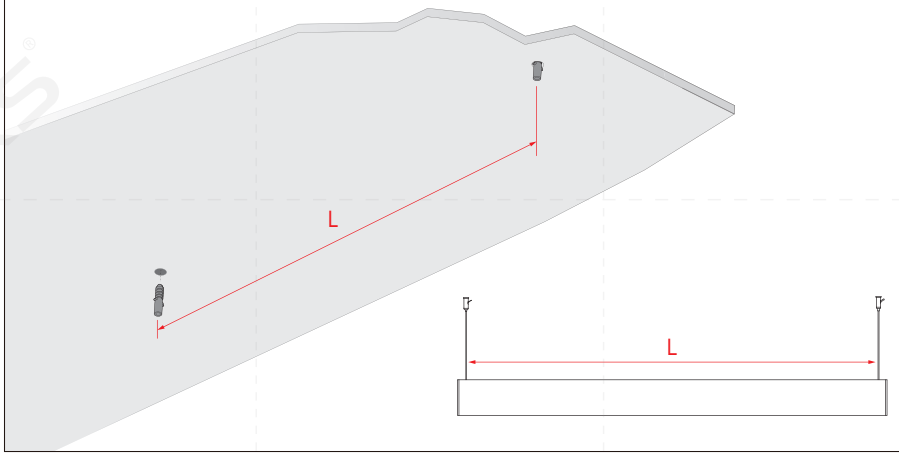


2 Screw the one end of the pendant cable into the ceiling, as shown below.

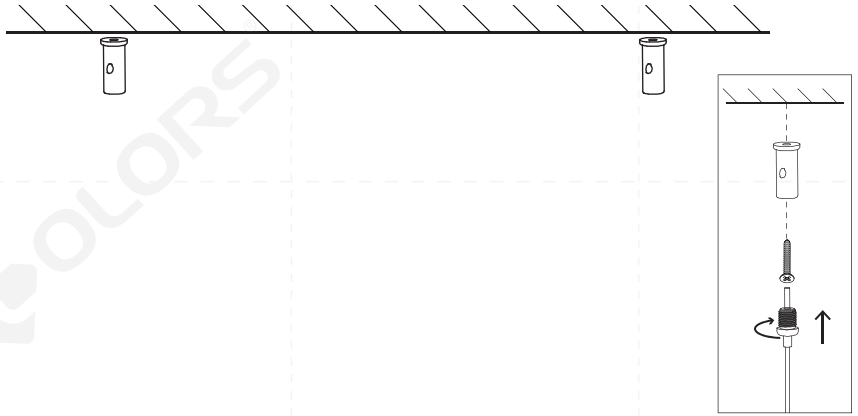

3 Pull the cable to adjust the cable length, as shown below.

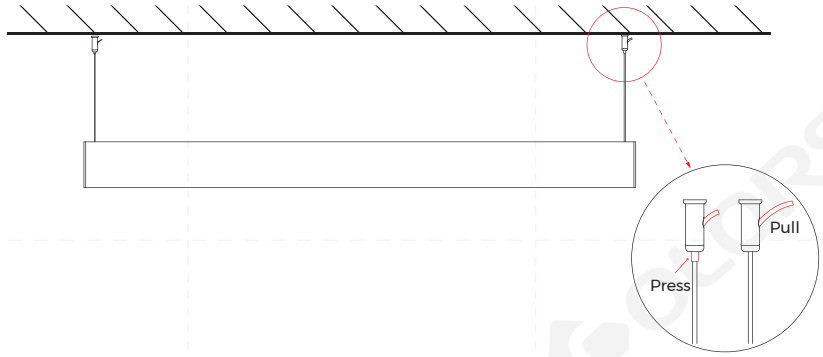

4 Power connection, then finish.

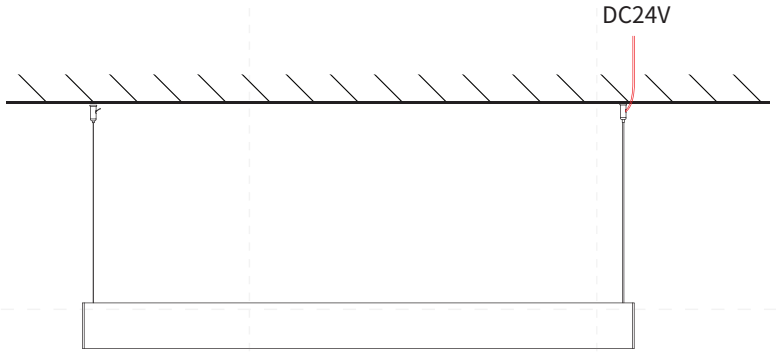


COLORS®
Linear Lighting


Tel: +86-755-2923-1888
E-mail: colors@colorsled.com
Web: www.colorsled.com
Add: Building A5, Qixing Wisdom Park,
Shiyan Youth Road, Bao'an District, Shenzhen, China

Pendant: LS25 series

1 asured the distance “L” between the two pendant cables, drill two φ5mm holes in the corresponding positions on the ceiling, install the screw stopper into the hole.

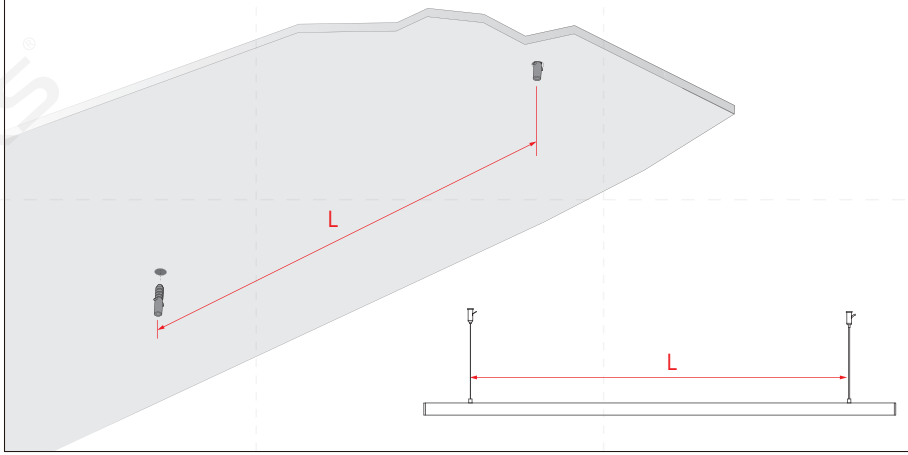


2 ew the one end of the pendant cable into the ceiling, as shown below.

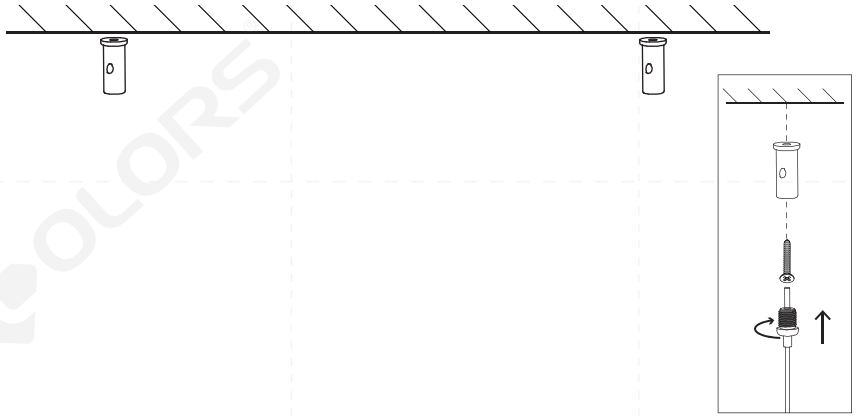

3 l the cable to adjust the cable length, as shown below.



4 ver connection, then finish.

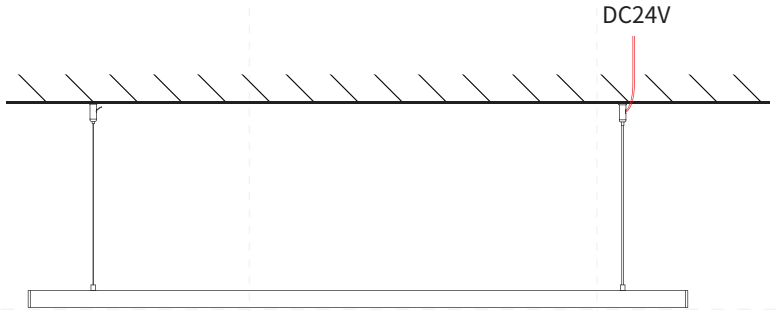


COLORS®
Linear Lighting


Tel: +86-755-2923-1888
E-mail: colors@colorsled.com
Web: www.colorsled.com
Add: Building A5, Qixing Wisdom Park,
Shiyan Youth Road, Bao'an District, Shenzhen, China

Surface mounted： LM25 series


1 Measure the distance L between the clips, lock the rotating clip, and open the power line hole of the ceiling at the same time.

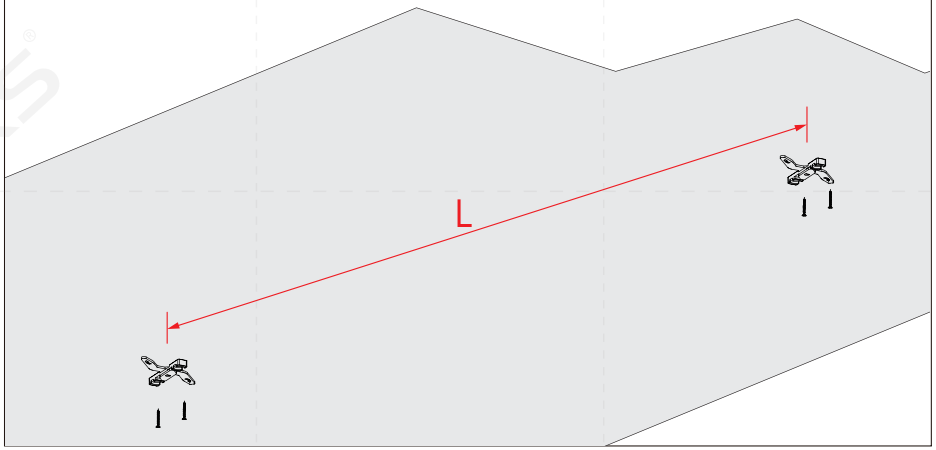


2 Align the clip position and pass the power line through the power line hole at the same time.

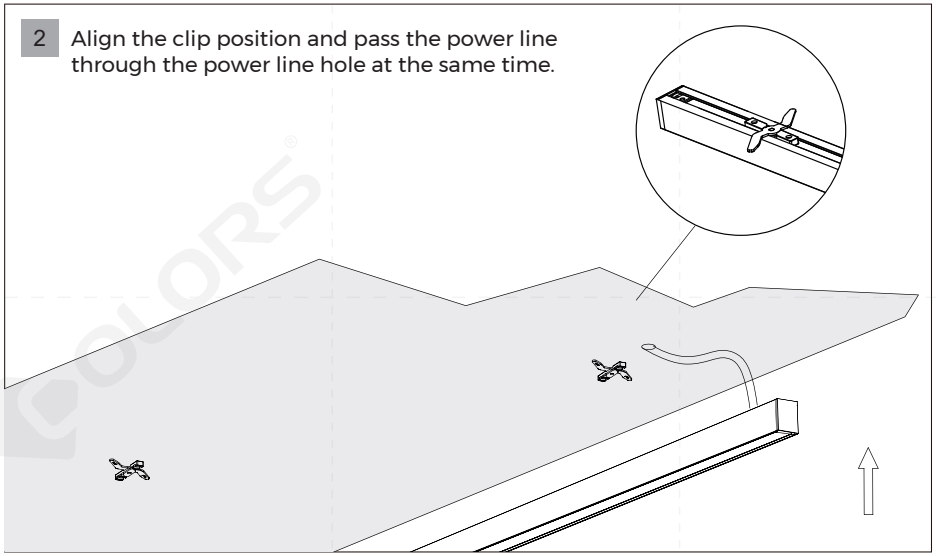

3 After the profile is close to the clip, rotate the clip to fix the profile.

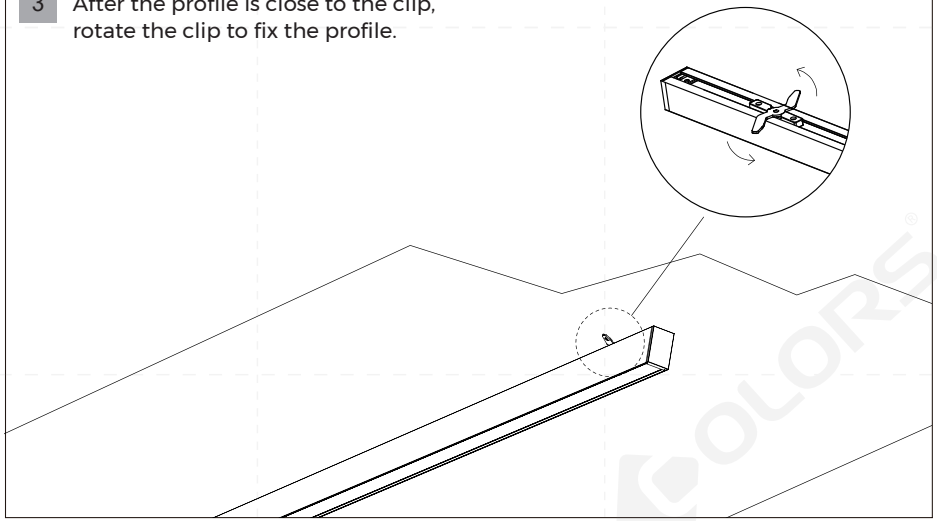

4 After the installation is completed, the lamp can be turned on when it is powered on.

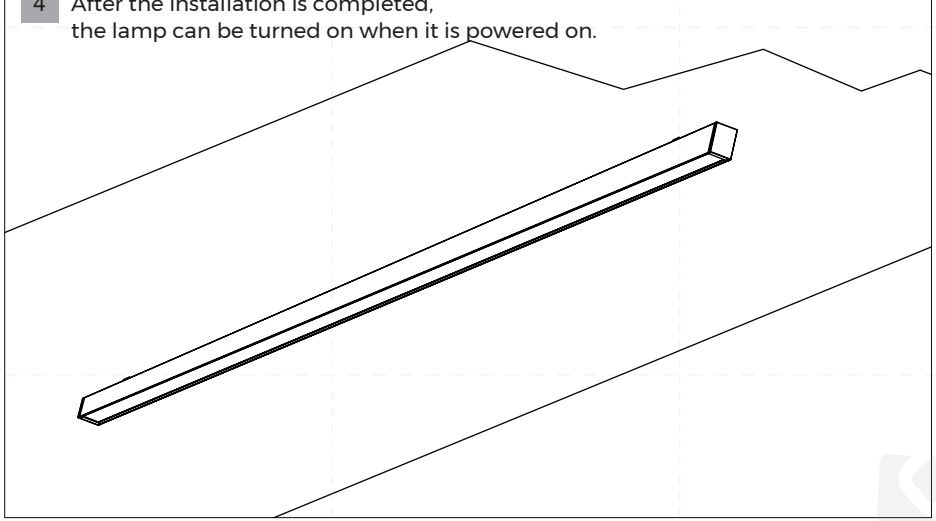


COLORS® Linear Lighting


Tel: +86-755-2923-1888
E-mail: colors@colorsled.com
Web: www.colorsled.com
Add: Building A5, Qixing Wisdom Park,
Shiyan Youth Road, Bao'an District, Shenzhen, China

Wall mounted： LC25 series


1 Prepare the required accessories

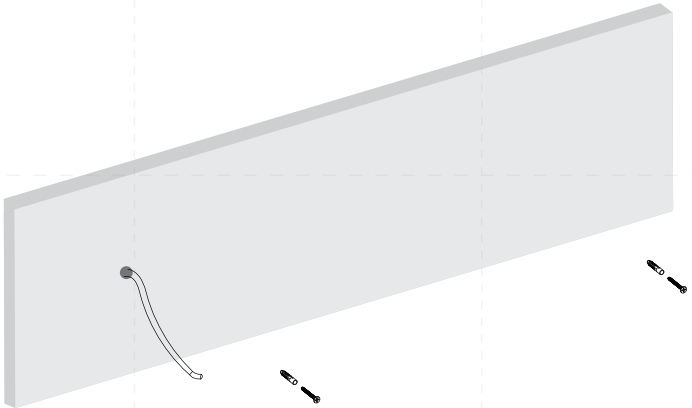


2 Measure the distance of installation holes, open Ø5mm holes on the wall. Drive into expansion plug and fix with screws.

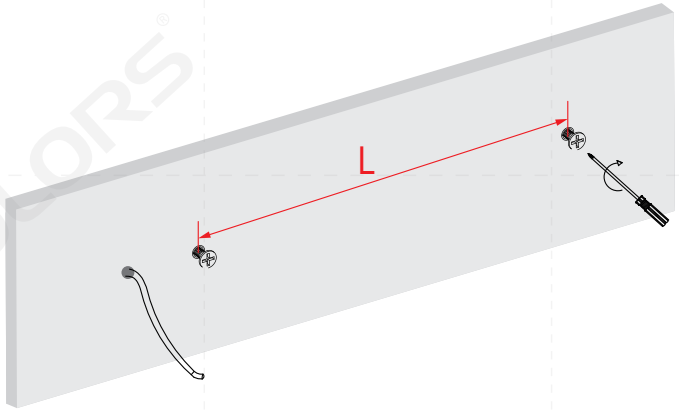

3 Connect cable of luminaire to power supply, then then snap keyholes of luminaire into the screws.

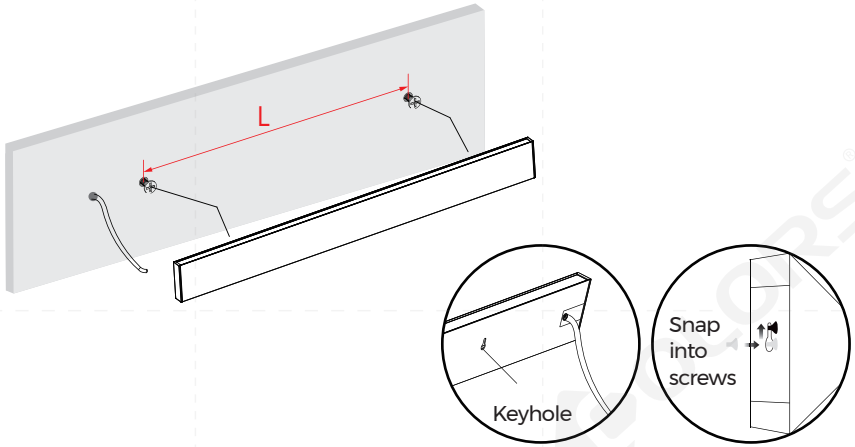

4 Finish installation. Power on to light up luminaire.

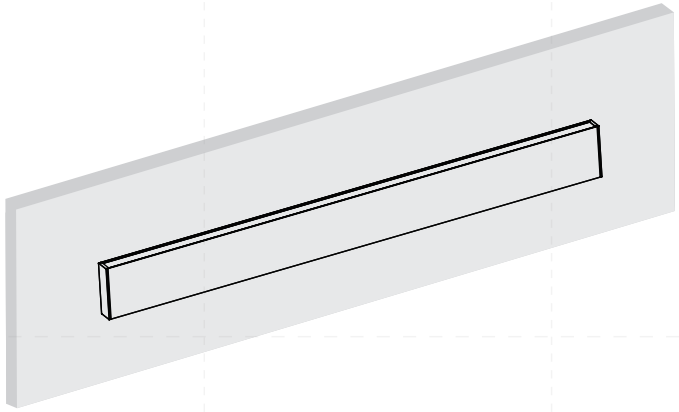


COLORS® Linear Lighting


Tel: +86-755-2923-1888
E-mail: colors@colorsled.com
Web: www.colorsled.com
Add: Building A5, Qixing Wisdom Park,
Shiyan Youth Road, Bao'an District, Shenzhen, China

Surface mounted： LH25 series


1 Insert 2pcs ceiling fitting into both ends of profile back.

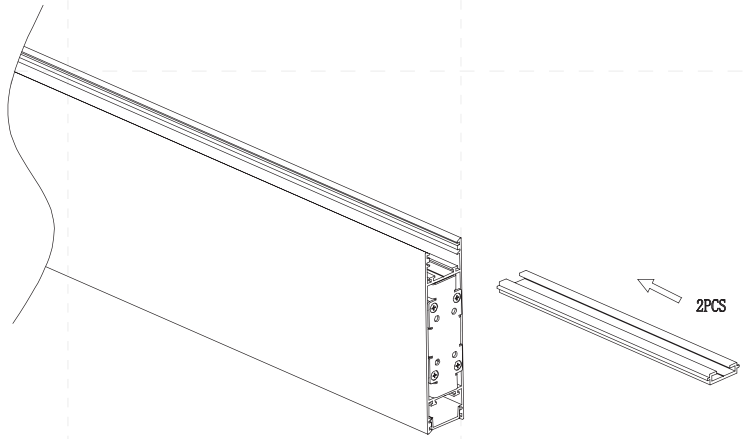


2 Lock the fixing screw

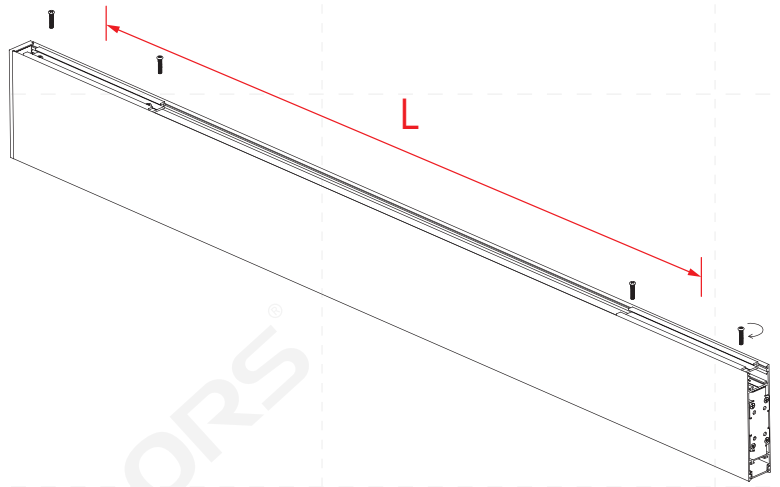


3 Measure the distance L between the clips, lock the rotating clip, and open the power line hole of the ceiling at the same time.

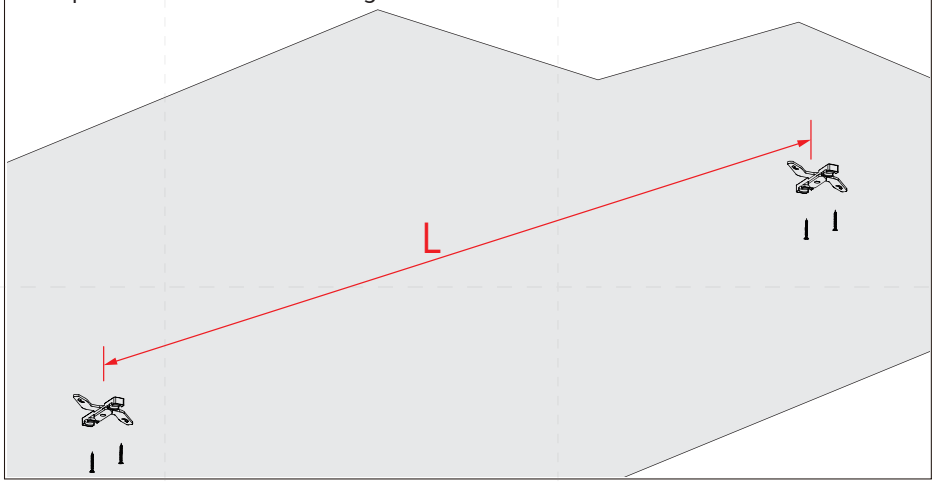


4 Align the clip position and pass the power line through the power line hole at the same time.

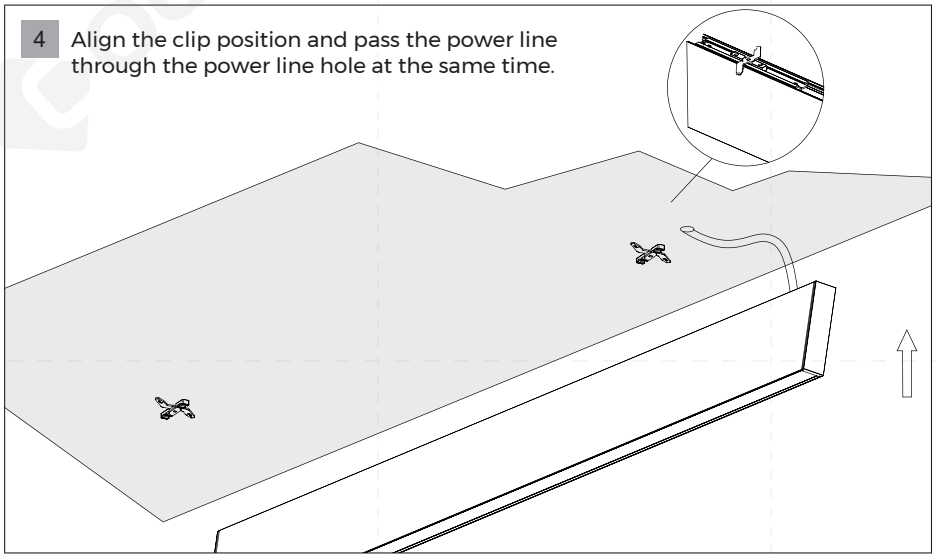

5 After the profile is close to the clip, rotate the clip to fix the profile.

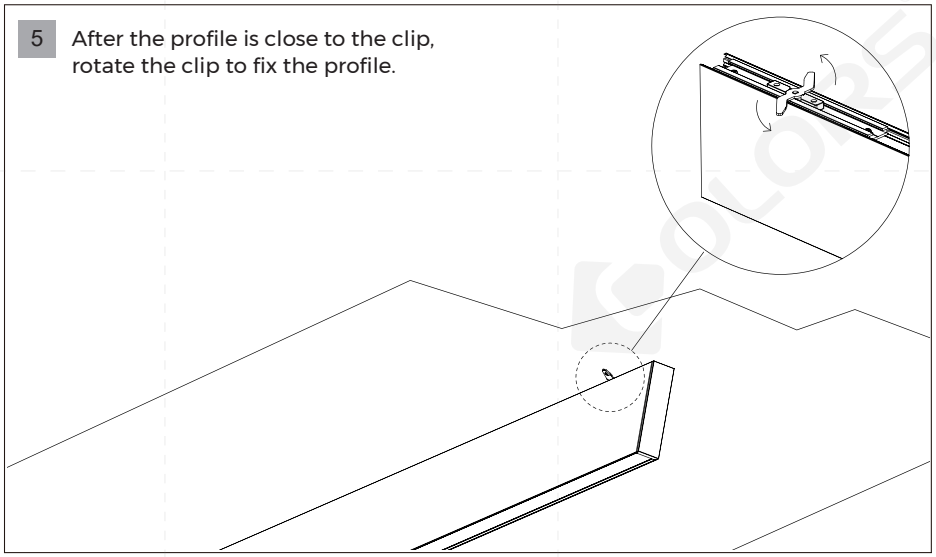

6 After the installation is completed, the lamp can be turned on when it is powered on.

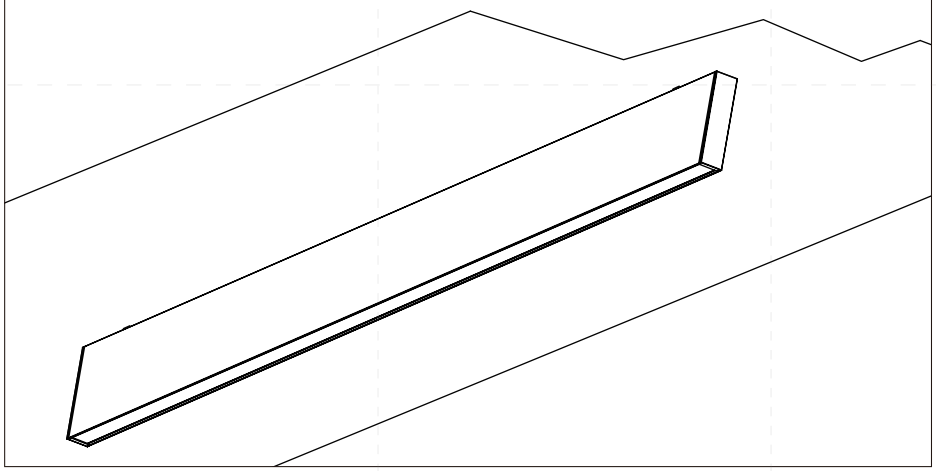

COLORS® Linear Lighting

Tel: +86-755-2923-1888
E-mail: colors@colorsled.com
Web: www.colorsled.com
Add: Building A5, Qixing Wisdom Park,
Shiyan Youth Road, Bao'an District, Shenzhen, China