COLORS®

Silicone wire Specification

S2P-20W
S3P-20W
S4P-20W
S5P-22W



E-mail:colors@colorsled.com

Version：A00


www.colorsled.com

【Features】


Picture	Model	Material	Termination Points	Wire Size	Outer Diameter	Wire Length	Appearance Color	IP
	S2P-20W	Silicone	2PIN	20AWG(Red/Black)	φ5.3-5.7mm	10000mm 50000mm 100000mm	White	IP67
	S3P-20W	Silicone	3PIN	20AWG (Black/Yellow/White)	φ5.8-6.1mm	10000mm 50000mm 100000mm	White	IP67
	S4P-20W	Silicone	4PIN	20AWG (Red/Black/Blue/Green)	φ5.8-6.2mm	10000mm 50000mm 100000mm	White	IP67
	S5P-22W	Silicone	5PIN	22AWG (Red/Black /Blue/Green/White)	φ5.8-6.2mm	10000mm 50000mm 100000mm	White	IP67

【Mechanical Parameter】


S2P-20W

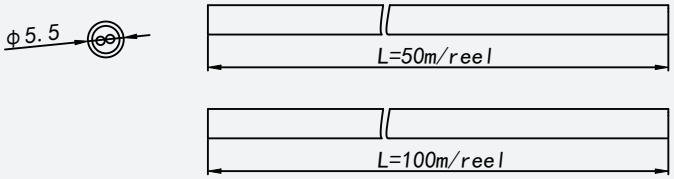

S3P-20W

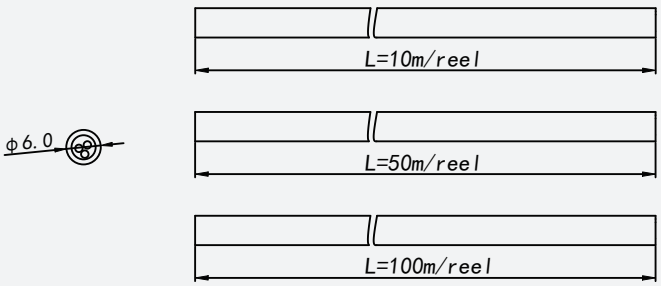


S4P-20W

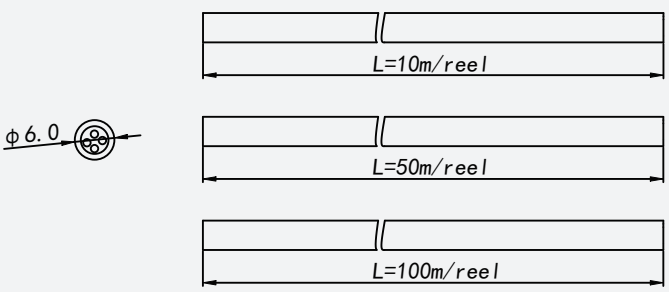


【Mechanical Parameter】

S5P-22W

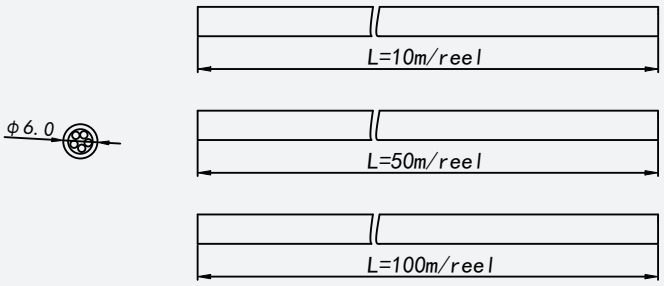

【Specification Information】

Description	Accessories Picture	Order model	Quantity/ case (m)	Per box net weight (kg)	Gross weight (kg)	Packages (mm)	Compatible products
2P white silicone wire		S2P-20W	100	19.0	20.1	255*255*260	Suitable for single color strip
3P white silicone wire		S3P-20W	100	19.0	20.1	255*255*260	Suitable for CCT strip
4P white silicone wire		S4P-20W	100	19.0	20.1	255*255*260	Suitable for RGB strip
5P white silicone wire		S5P-22W	100	19.0	20.1	255*255*260	Suitable for RGBW/DMX strip

【Precautions】

· Silicone wires need to be used with ENP/EP cap.