

INSTRUCTION **MANUAL A**

BILIA

Art. 01-2600, 01-2601, 01-2602, 01-2603
SMD LED, 5W

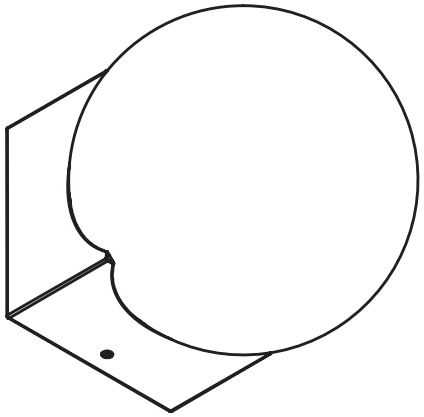


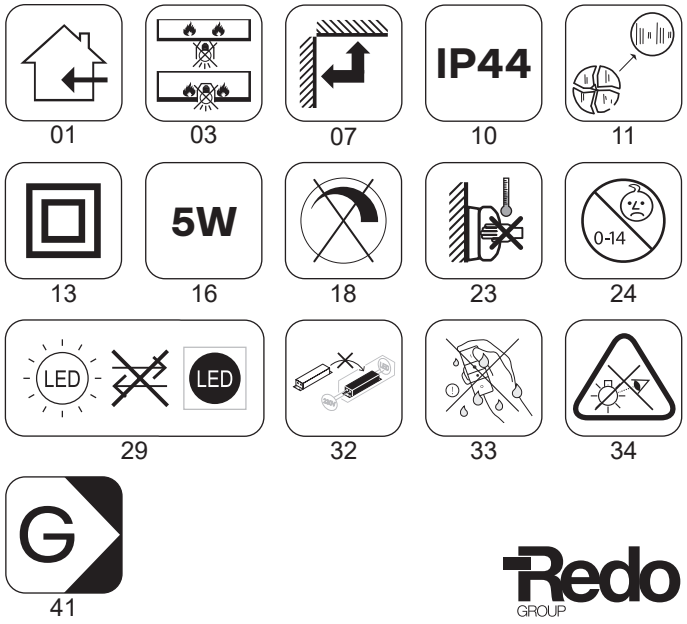


01 03 07 10 11
13 16 18 23 24
29 32 33 34
41

Redo GROUP


A

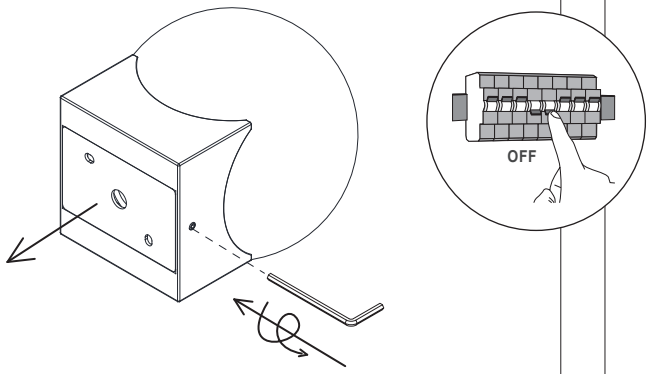


B

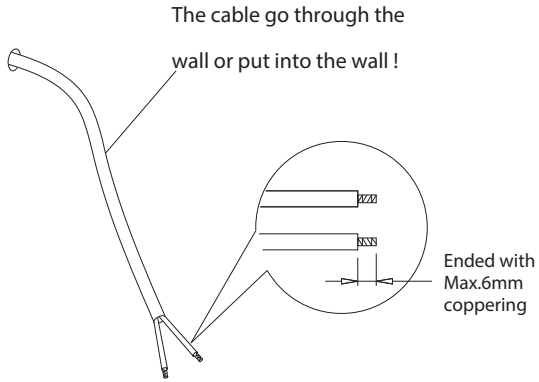


C

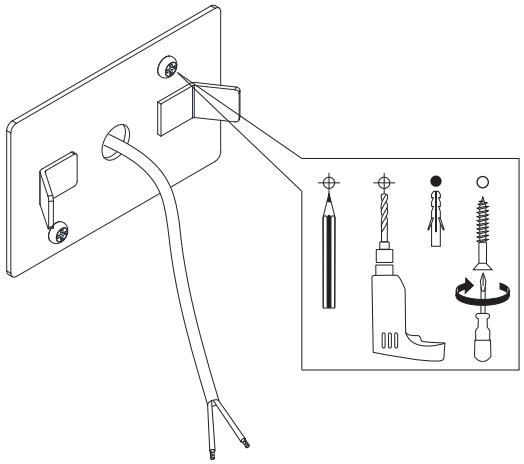


D

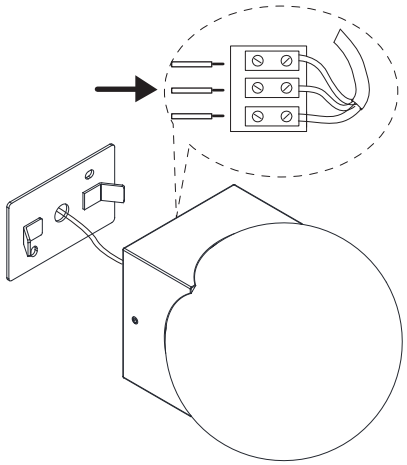

E

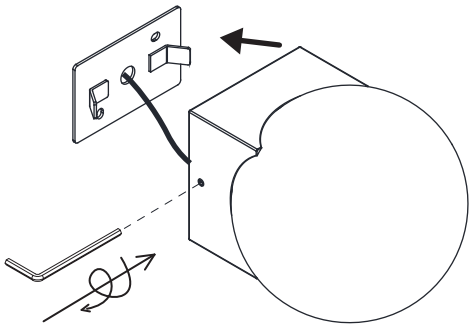

F

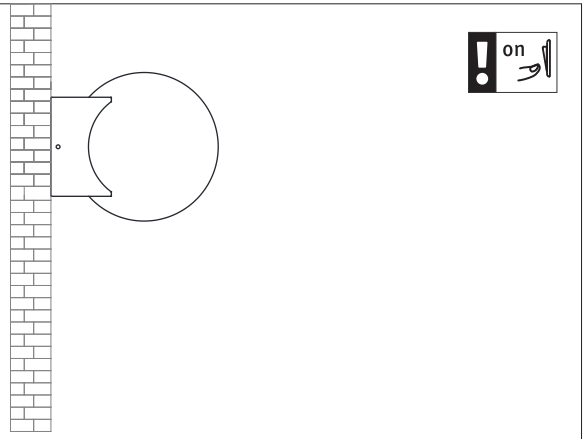

INSTRUCTION **MANUAL A**


BILIA

Art. SKBR02SWH, SKBR02BS, SKBR02CH, SKBR02SBK
max. 30W




01 03 05 10 13 16 17 23 24 33 34


1

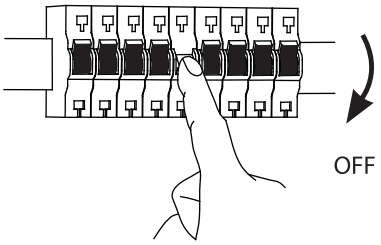


2

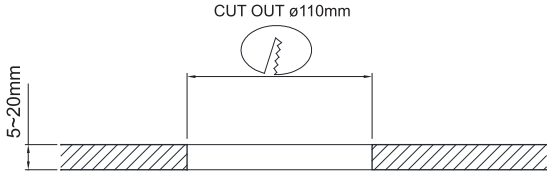


3

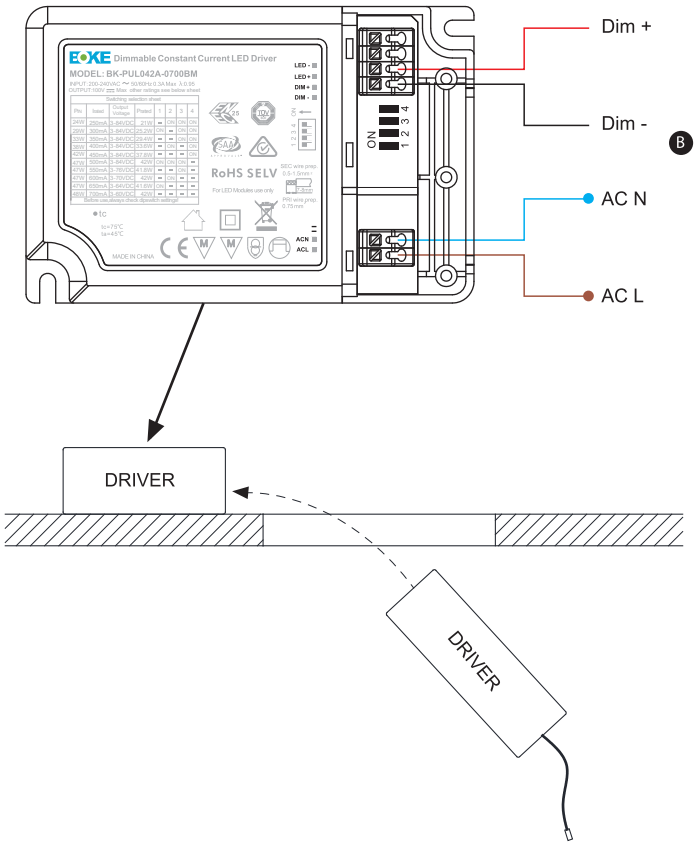


4

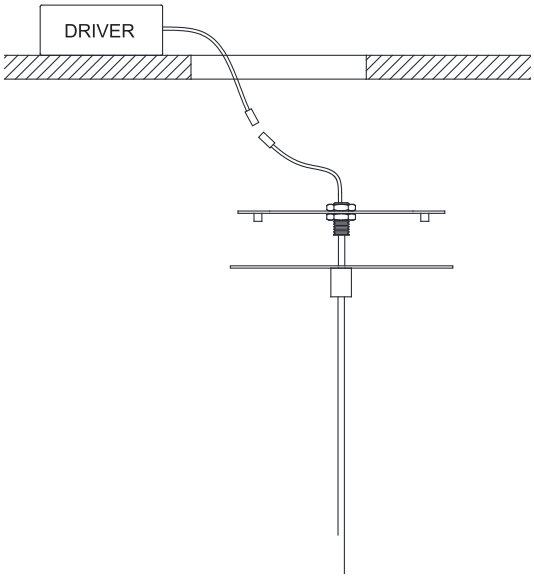


5

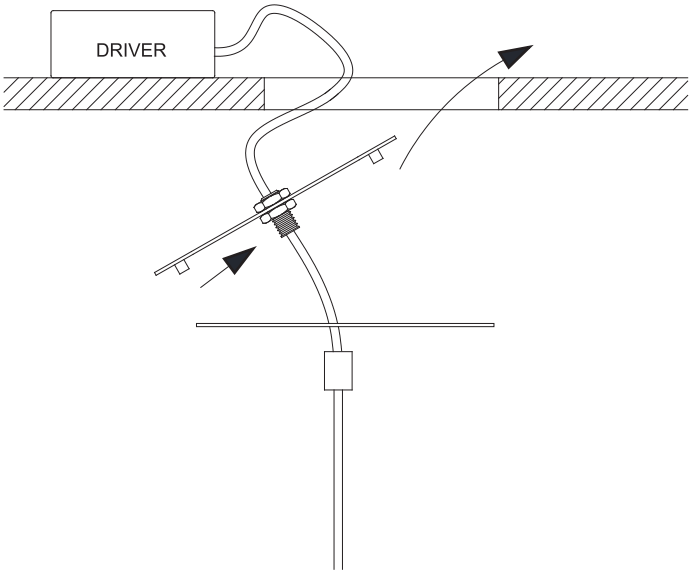

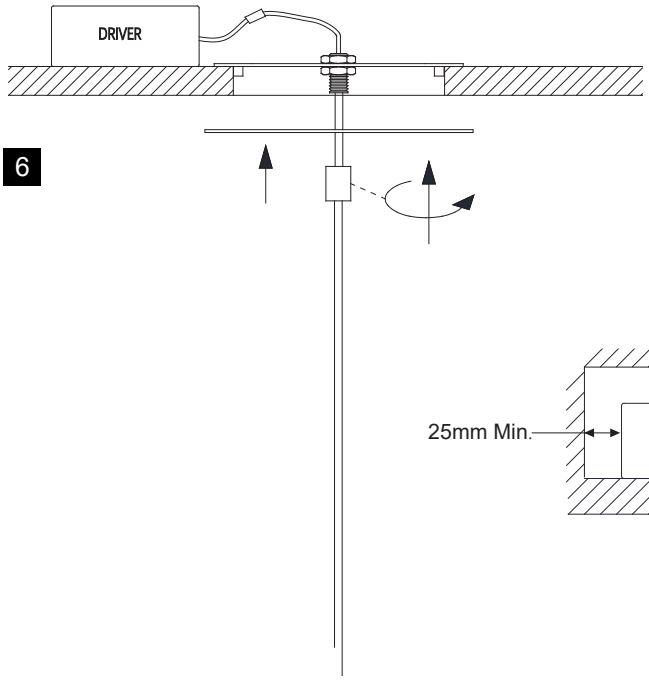


6

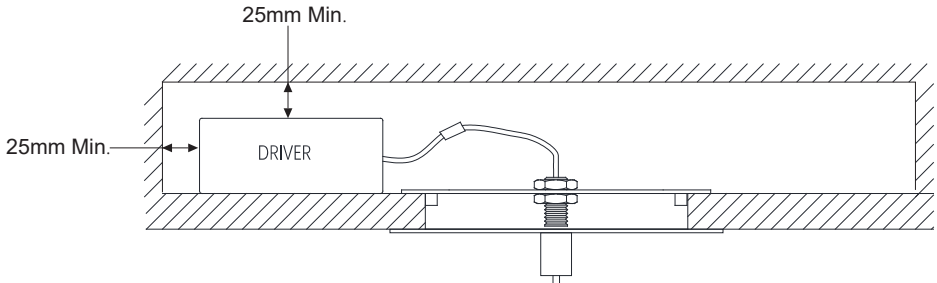


ATTENTION


1. Please make sure complete the connection of glass before switch on.
2. When replacing the lampshade, turn off the power supply for 2 minutes and then operate

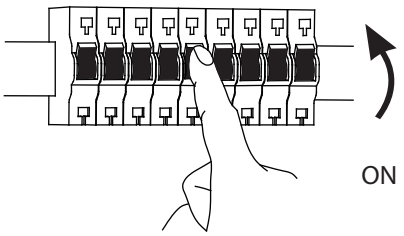

8

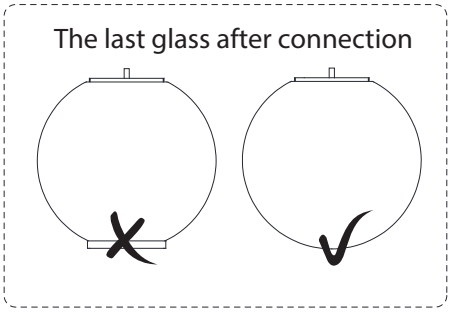

7

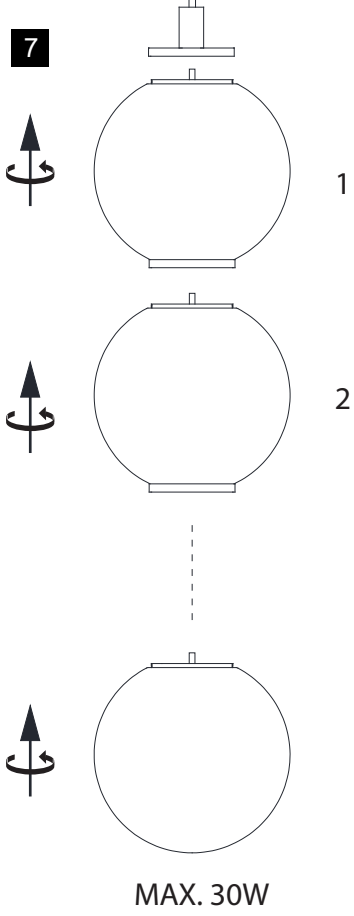

INSTRUCTION **MANUAL A**


BILIA

Art. SKBR01SWH, SKBR01BS, SKBR01CH, SKBR01SBK
max. 30W




01 03 05 10 13 16 17 23 24 33 34


1

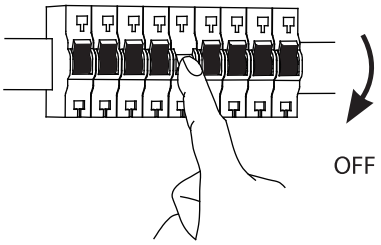


2

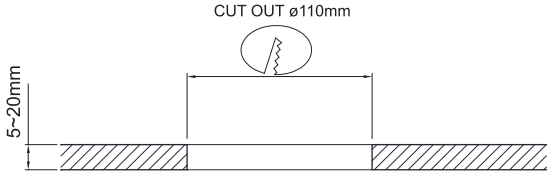


3

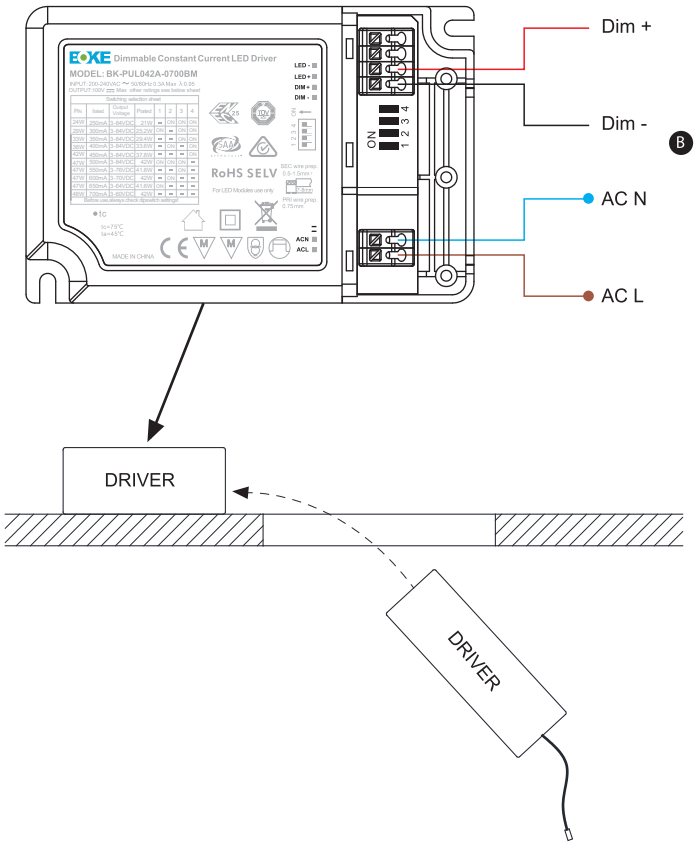


4

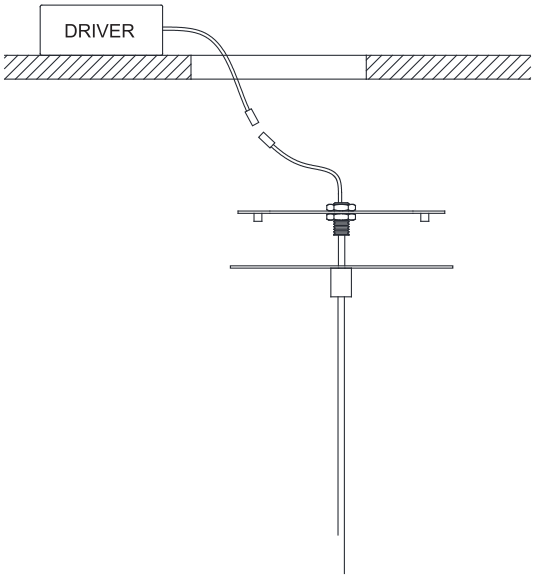


5

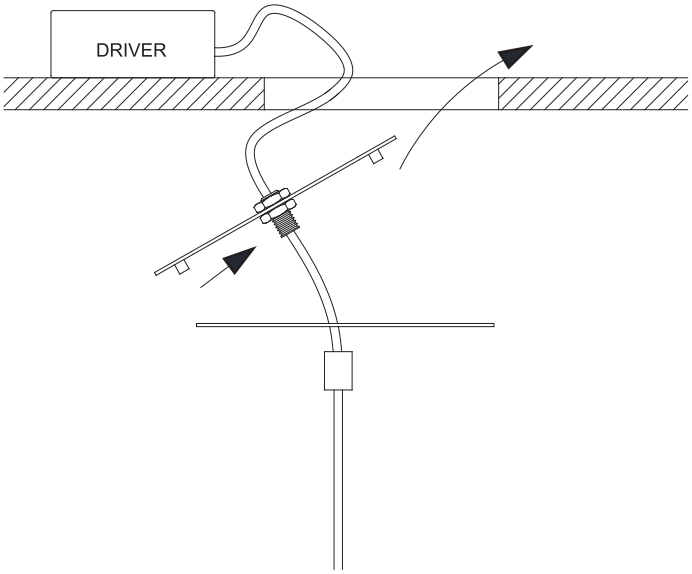

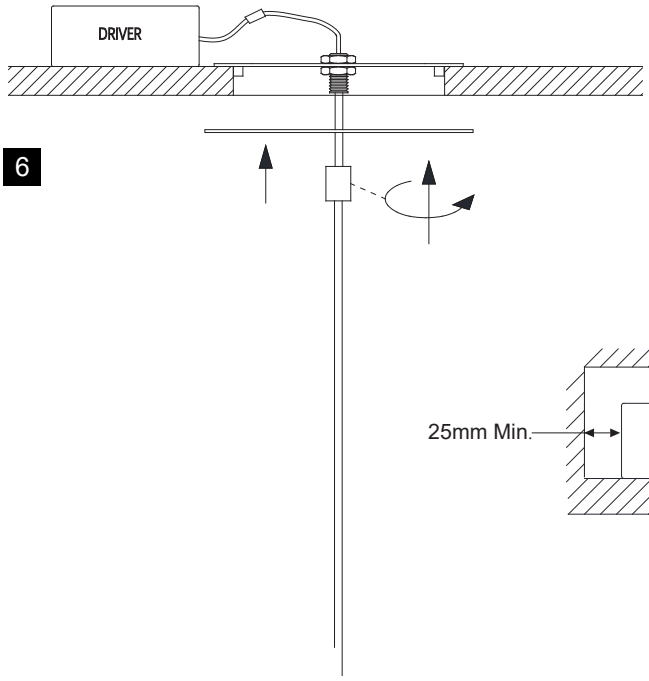


6

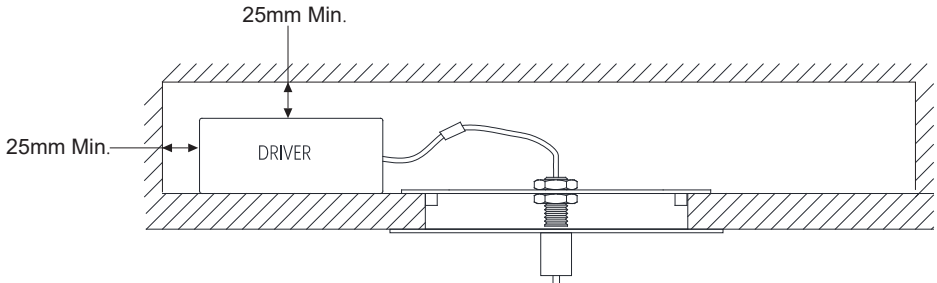


ATTENTION


1. Please make sure complete the connection of glass before switch on.
2. When replacing the lampshade, turn off the power supply for 2 minutes and then operate

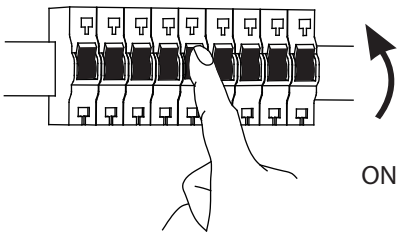

8

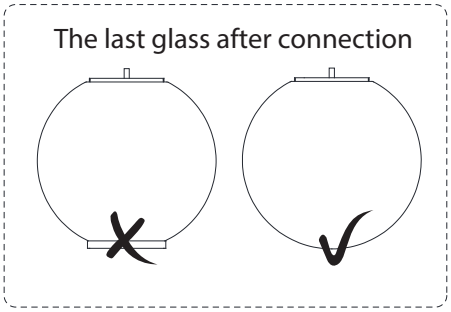

7

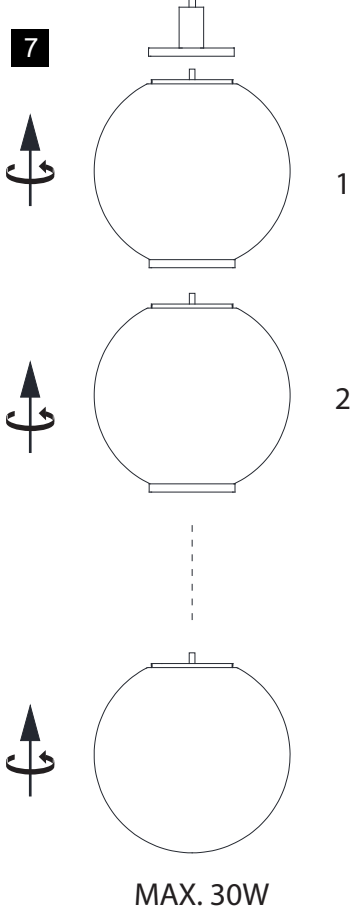

INSTRUCTION **MANUAL A**


BILIA

Art. SKBS01SWH, SKBS01BS, SKBS01CH, SKBS01SBK
max. 30W




01 03 05 10 13 16 17 23 24 33 34


1

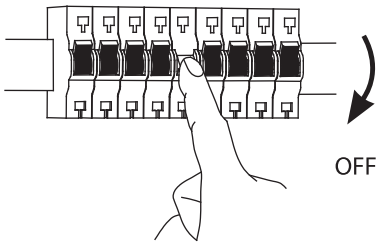


2




3

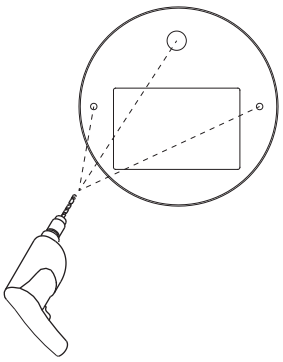



4

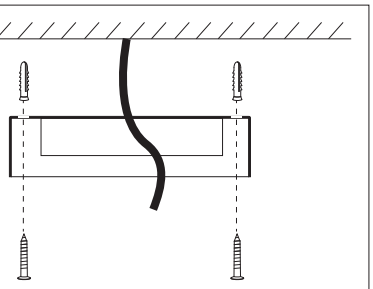

5

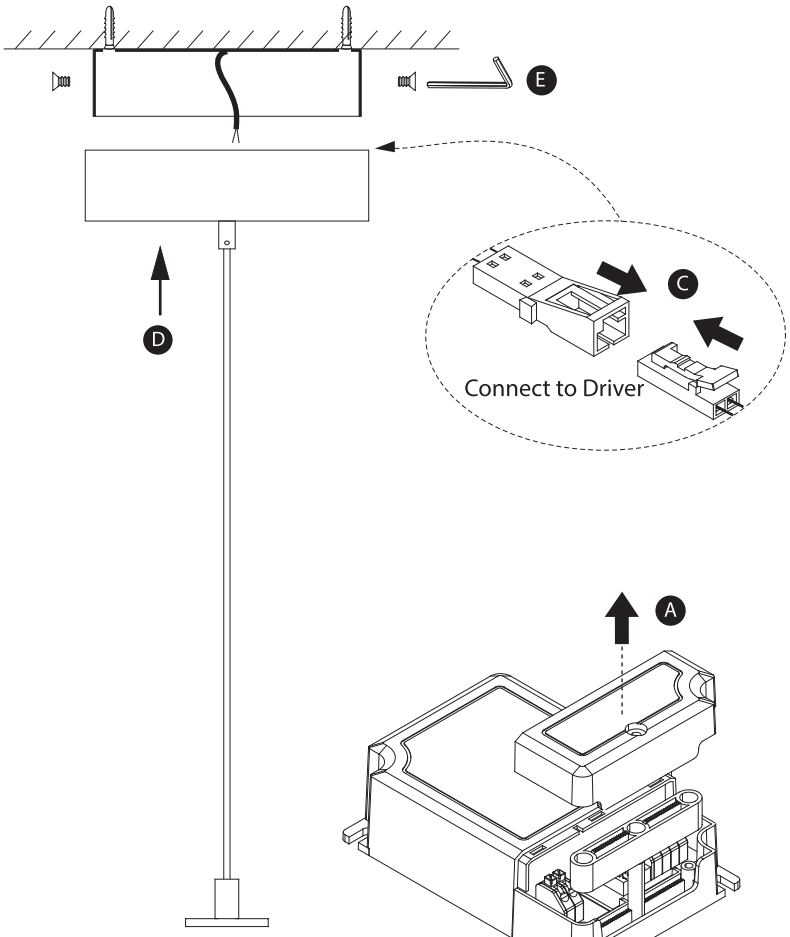


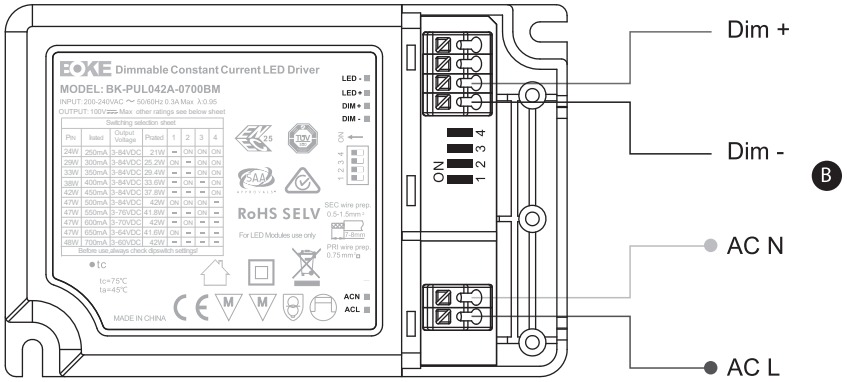


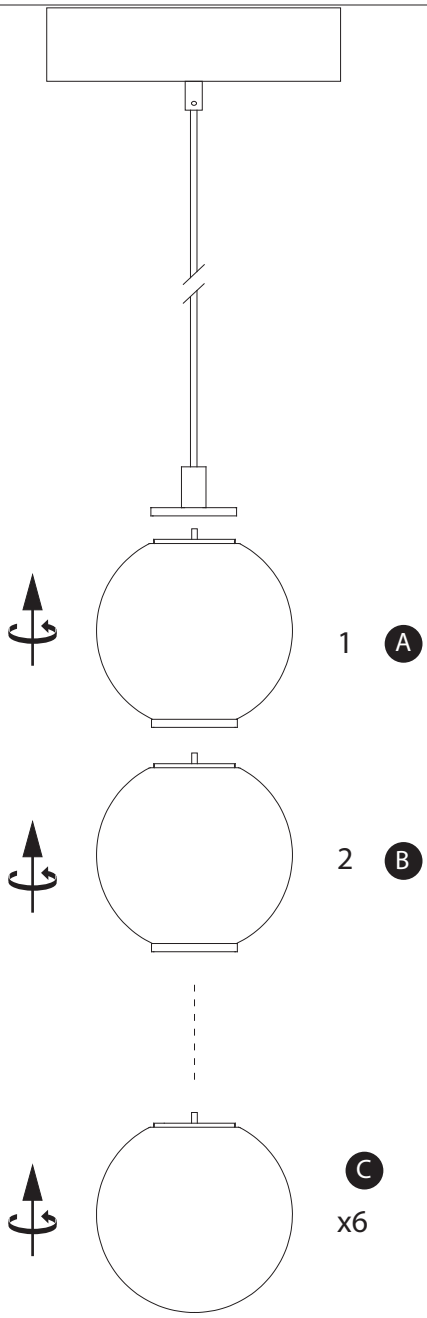

ATTENTION

1. Please make sure complete the connection of glass before switch on.
2. When replacing the lampshade, turn off the power supply for 2 minutes and then operate

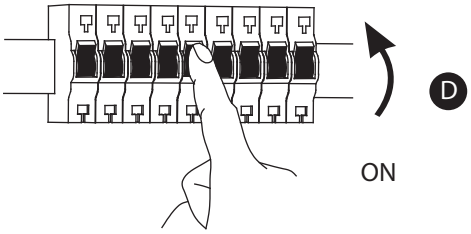

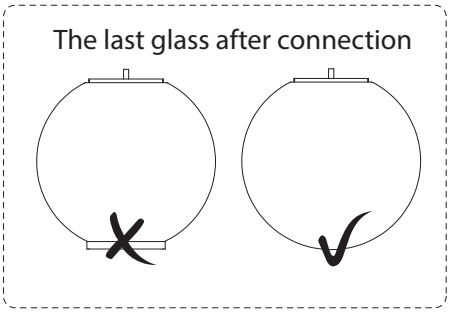

1-10VDC / 10V PWM

