DATASHEET

FIŞA TEHNICĂ / SCHEDA DATI / ТЕХНИЧЕСКАЯ СПЕЦИФИКАЦИЯ / ADATLAP / ЛИСТ С ДАННИ / DÁTOVÝ HÁROK

TORCH

Art. 90444

EN - Decorative outdoor lighting fixture, equipped with CREE XTE LED. Aluminium housing electrostatically painted in dark green, frost acrylic diffuser. Delivered with picket for ground installation, 2 meters power supply cable and IP68 connector. The 24V DC must be ordered separately.

RO - Corp de iluminat decorativ pentru exterior, echipat cu LED CREE XTE. Structură din aluminiu vopsită în câmp electrostatic verde închis, dispersor din acril satinat. Se livrează cu pichet pentru instalare, 2 metri cablu de alimentare și conector IP68. Driverul 24V DC se comanda separat.

IT - Apparecchio di illuminazione decorativo per esterni, dotato di LED CREE XTE. Corpo in alluminio verniciato a polveri verde scuro, diffusore in acrilico satinato. Consegnato con picchetto per installazione a terra, cavo di alimentazione e connettore IP68. Driver 24V DC da ordinare separatamente.

RU - Наружный декоративный осветительный прибор, оснащенный светодиодом CREE XTE. Алюминиевая структура, с электростатической покраской в тёмно-зелёный цвет, рассеиватель из сатинового акрила. Поставка вместе со столбом для установки, с кабелем питания длиной 2 метра и разъёмом IP68. Привод постоянного тока 24 В заказывается отдельно.


HU - Kültéri dekorativ lámpatest , CREE XTE LED-el szerelve. elektrosztatikus mezőben sötét zöld festett alumínium lámpatest, akril szatén diszperzór. Leszúró tüstkével , 2m betáp kábellel és IP68 csatlakozóval szállítva. 24V DC működtető nem tartozék.

BG - Декоративно външно осветително тяло, оборудвано с CREE XTE LED. Алуминиева структура боядисана в електростатично поле в тъмно зелено, дифузьор от сатенен акрилен. Доставя се с кол за монтиране, 2 метра захранващ кабел и IP68 конектор. Драйверът 24V DC се поръчва отделно.

SK - Dekoratívne exteriérové svietidlo, vybavené CREE XTE LED. Hliníkové konštrukcia elektrostaticky lakovaná v tmavozelenej, mrazuvzdorný akrylový difúzor. Dodáva sa s piketom pre pozemnú inštaláciu, 2 metrovým napájacím káblom a konektorom IP68. 24V DC je potrebné objednať samostatne.


Product type / color	**Picket / Dark green**
Input voltage	**24V DC**
Power	**1,5W**
Led type	**XTE CREE 1pcs x 1,5W**
Color temperature	**3000K**
Led luminous flux	**124 lm**
System luminous flux	**80 lm**
CRI / Optics	**≥80 / -**
Control	**TRIAC, CASAMBI, DALI, TUYA (Remote)**
Øuse (lm) / Pon (w)	**124 / 1.3**
FTM / ЛТМ	**0.926 / 88.33**
Energy efficiency class	**F**
Warranty (years)	**3**
Protection class	**Class III**
IP / IK rating	**IP65 / IK06**
Work temperature	**-20° / +45°C**
LED lifespan	**50.000 hours**



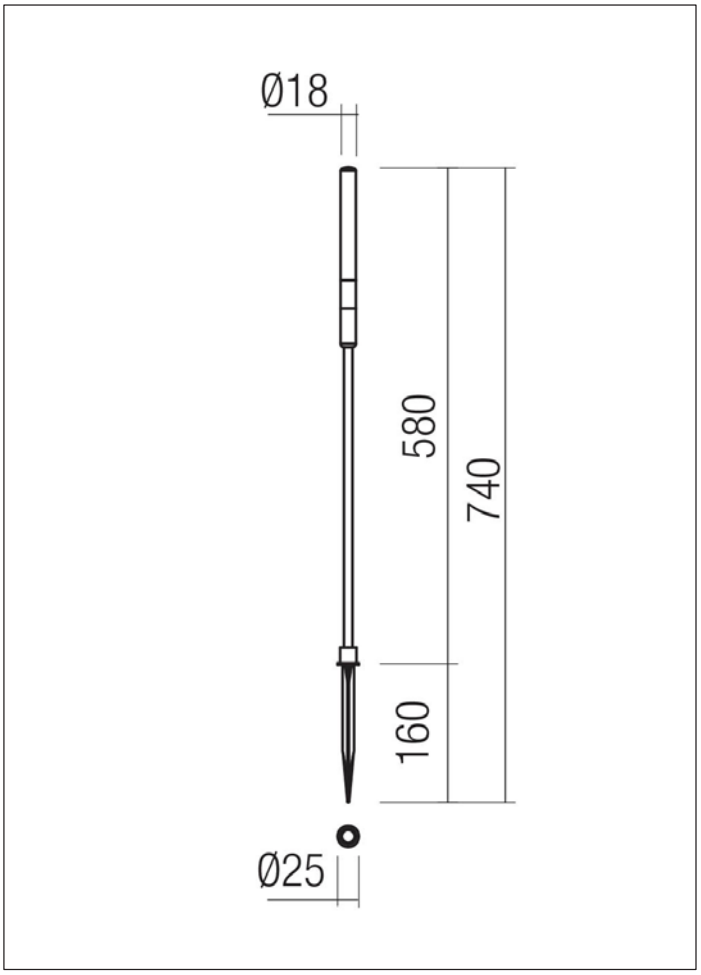

CE RoHS compliant

LED removal by a specialist	**Yes**
DRIVER removal by a specialist	**Yes**
Anti rust and corosion treatment	**Yes**
Front sea suitable	**No**

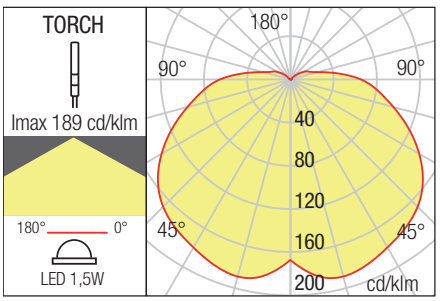

Standards: EN60598-1:2015/A1:2018, EN 60598-2-3:2003 + A1:2011, EN 62493:2015, EN 62471:2008, EN IEC 62031: 2020, EN IEC 55015:2019/A11:2020, EN IEC 61000-3-2: 2019/A1:2021, EN 61000-3-3: 2013/A2: 2021, EN 61547:2009. Made in PRC.

REDO GROUP S.R.L. Str. Alexei Tolstoi, nr. 12, Bacău - 600093, ROMÂNIA.
Tel: +40 0234 514 492 / 546 620. Fax: +40 0234 546 677.

Last update: 08/2025

Redo GROUP

www.redogroup.ro