MOVE.iT

sales@rayconn.net

Adaptable to your store planning.

MOVE.iT


www.rayconn.net


sales@rayconn.net


TL4-PL122




44W

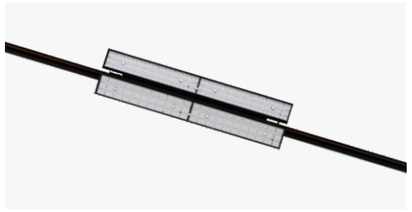

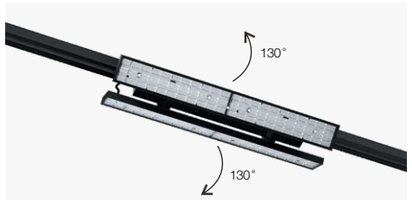




Light source:	SMD
Input Voltage:	AC220~240V 50/60Hz
LED Current:	1250mA, 31-34V
Beam Angle:	30°/60°/90°/Single Asymmetric/Double Asymmetric
Life Time:	> 50,000h - L80 - B10 (Ta 25°C)
Operating temperature:	-20~40
Certificate:	CE/RoHS
Weight:	2.5kg

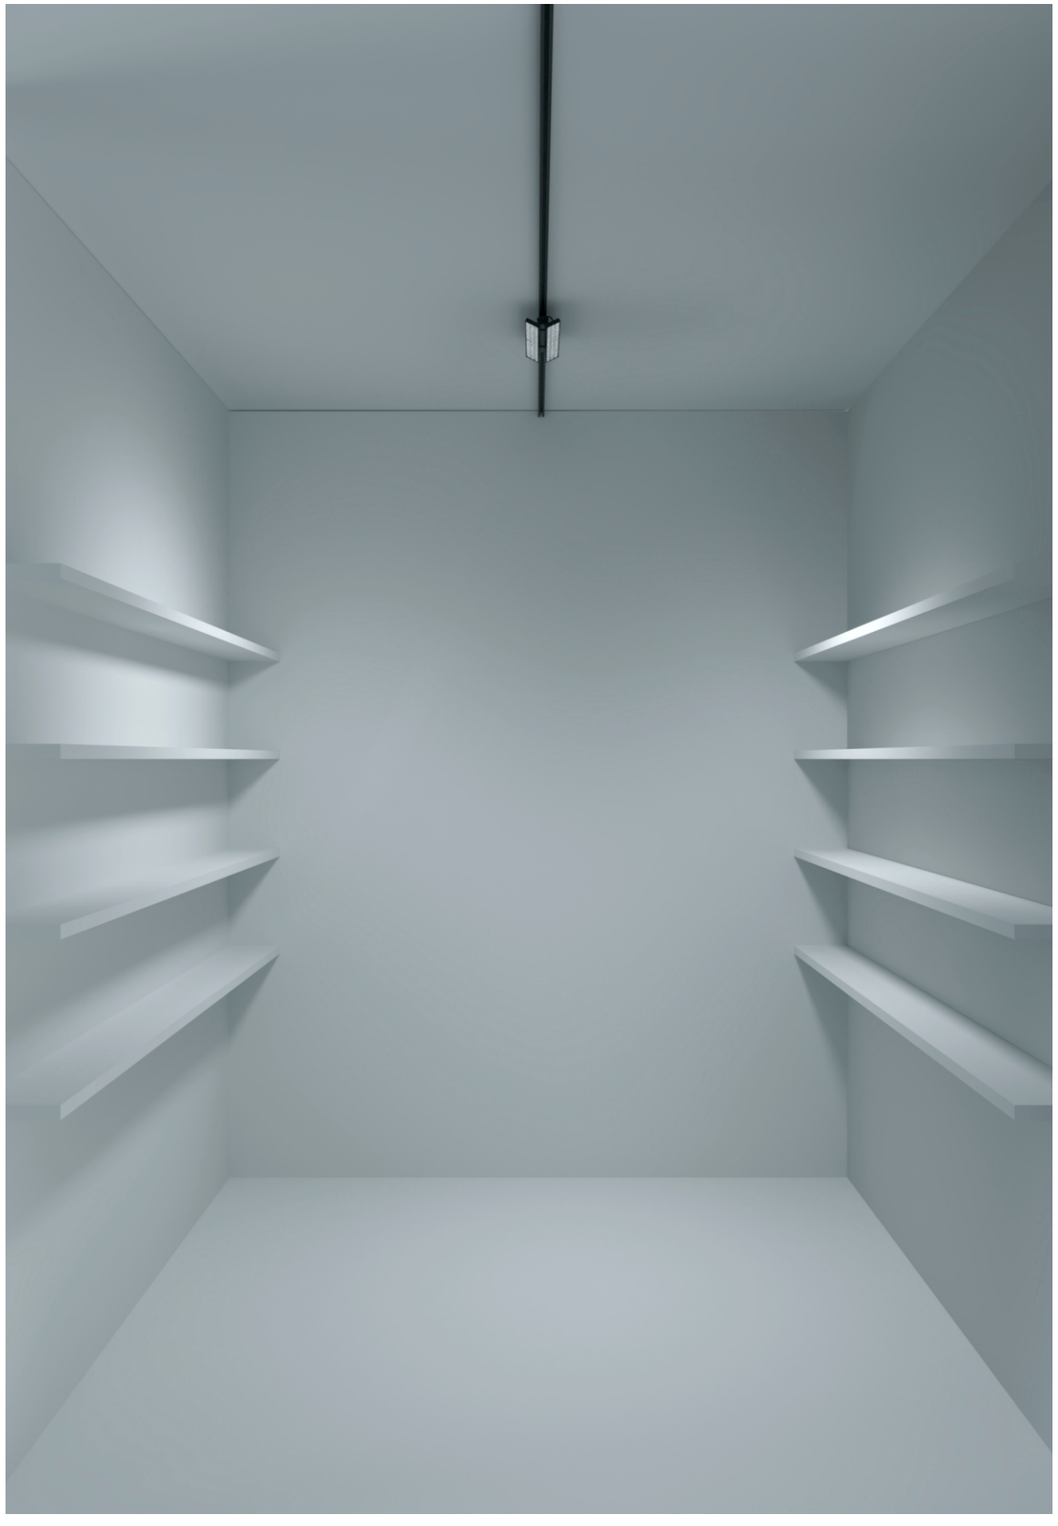


TL4-PL111



70W




Light source:	SMD
Input Voltage:	AC220~240V 50/60Hz
LED Current:	2000mA, 31-34V
Beam Angle:	36°/70°/90°/Single Asymmetric/Double Asymmetric
Life Time:	> 50,000h - L80 - B10 (Ta 25°C)
Operating temperature:	-20~40
Certificate:	CE/RoHS
Weight:	3.0kg

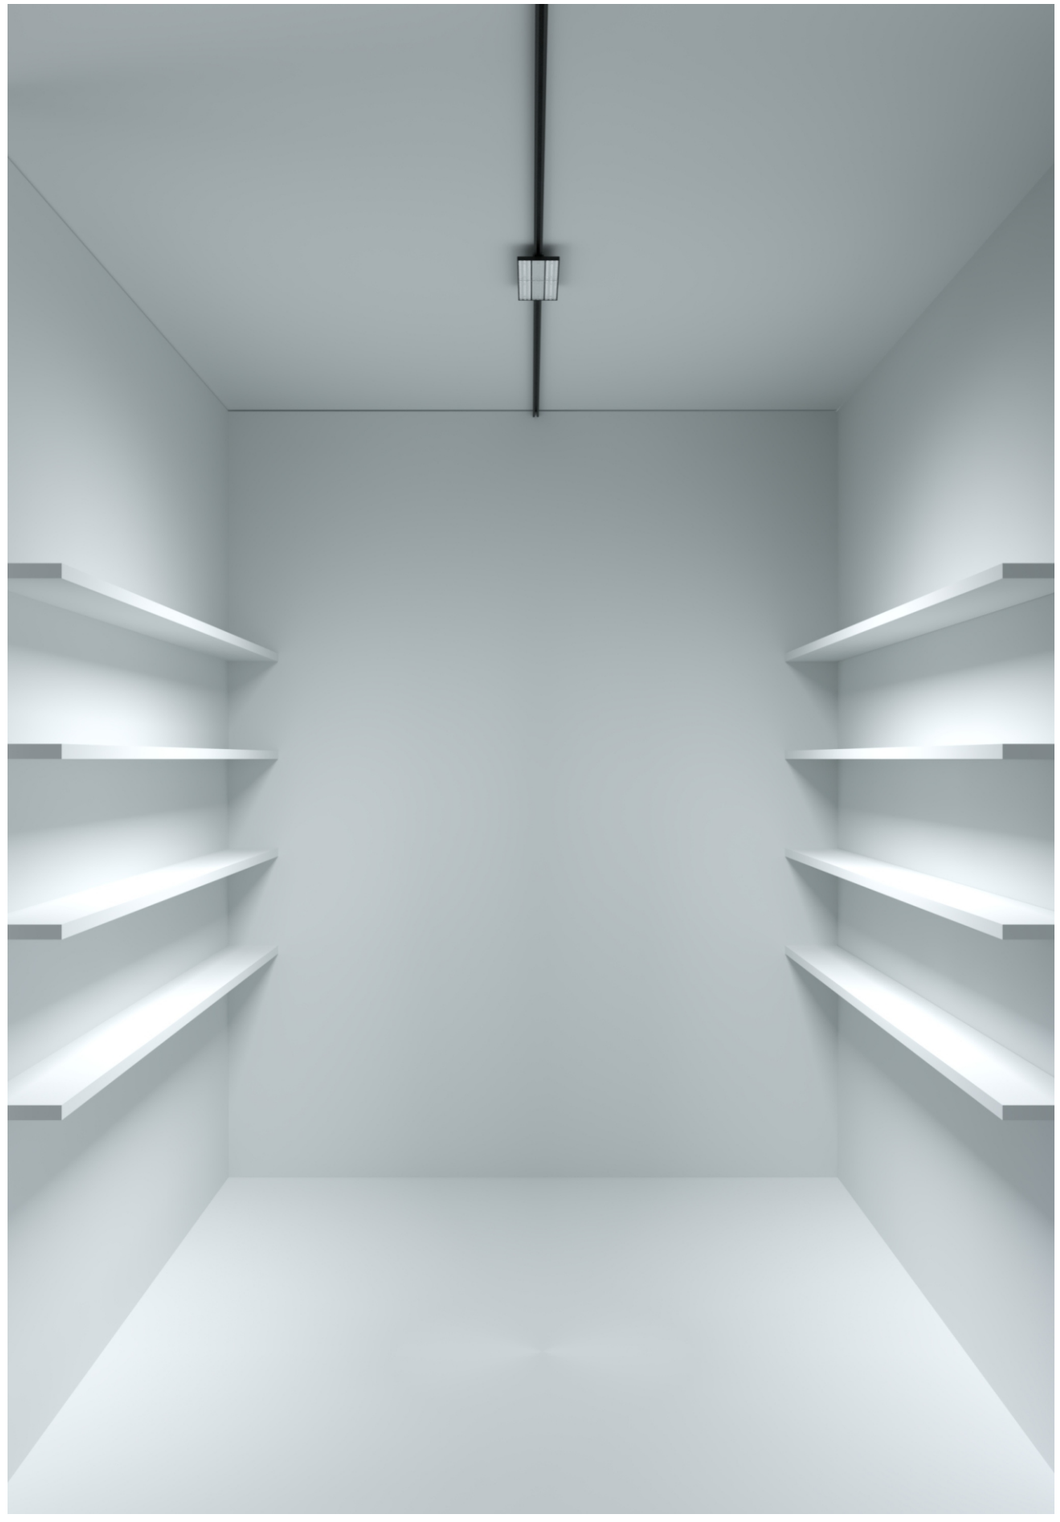




220V

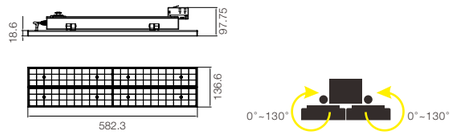

TL4-PL122 44W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	36°	5300lm	3000K	TL4-PL122-44W-830-B-36
		5620lm	4000K	TL4-PL122-44W-840-B-36
	70°	5540lm	3000K	TL4-PL122-44W-830-B-70
		5890lm	4000K	TL4-PL122-44W-840-B-70
	90°	5270lm	3000K	TL4-PL122-44W-830-B-90
		5560lm	4000K	TL4-PL122-44W-840-B-90
	SA	5450lm	3000K	TL4-PL122-44W-830-B-SA
		5780lm	4000K	TL4-PL122-44W-840-B-SA
	DA	5240lm	3000K	TL4-PL122-44W-830-B-DA
		5548lm	4000K	TL4-PL122-44W-840-B-DA


Light source: SMD
Input Voltage: AC220~240V 50/60Hz
LED Current: 1250mA, 31-34V
Beam Angle: 36°/70°/90°/Single Asymmetric/Double Asymmetric
Life Time: > 50,000h - L80 - B10(Ta 25°C)
Operating temperature: -20°C~40°C
Certificate: CE/RoHS
Weight: 2.5kg



Weight:23KG
Packaging: 645x541x400mm, 9pcs/CTN




220V



TL4-PL111 70W

CRI	Beam Angle	Luminous	CCT	Part Number
>90	36°	8570lm	3000K	TL4-PL111-70W-830-B-36
		9110lm	4000K	TL4-PL111-70W-840-B-36
	70°	8870lm	3000K	TL4-PL111-70W-830-B-70
		9440lm	4000K	TL4-PL111-70W-840-B-70
	90°	8550lm	3000K	TL4-PL111-70W-830-B-90
		9130lm	4000K	TL4-PL111-70W-840-B-90
	SA	8730lm	3000K	TL4-PL111-70W-830-B-SA
		9280lm	4000K	TL4-PL111-70W-840-B-SA
	DA	8300lm	3000K	TL4-PL111-70W-830-B-DA
		8960lm	4000K	TL4-PL111-70W-840-B-DA

Light source: SMD
Input Voltage: AC220~240V 50/60Hz
LED Current: 2000mA, 31-34V
Beam Angle: 36°/70°/90°/Single Asymmetric/Double Asymmetric
Life Time: > 50,000h - L80 - B10(Ta 25°C)
Operating temperature: -20°C~40°C
Certificate: CE/RoHS
Weight: 3.0kg



Weight:23KG
Packaging: 645x541x400mm, 9pcs/CTN