

06 Downlights Fixed LED>The IP54 Bathroom Downlights

10113B/W/W



13W LED recessed downlight, IP54. Suitable for bathroom installations.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

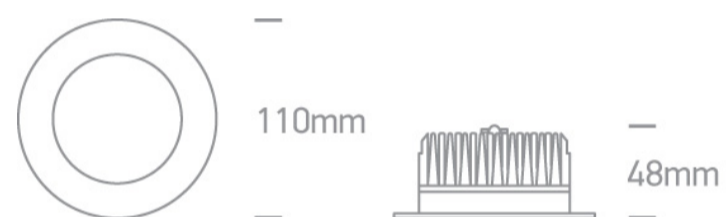

Gallery



Physical Specification

Product Type

Item Group

Family

Order Code

Colour

Material

Diffuser Material

Gear

06 Downlights Fixed LED

The IP54 Bathroom Downlights

10113B/W/W



White


Die Cast


Plastic

Shape	Circular
Height	48mm
Diameter	110mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Outdoor	Yes
Adjustable	No


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	13W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	380mA
Voltage	29V
Safety Class	
Power(Watts)	11W
IP Rating	IP54

Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	27
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,75-15,2W
Power Factor	0,9
Constant Current	Yes
Output	380mA
Voltage Range	23-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	45°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Cable


Illumination Data

Colour Temperature	3000K
Lumen Output	925lm
Light Efficiency	71,15lm/W
CRI	80
Beam Angle	90°
Illumination Diagram	

Packing Info

Box Length	11,5cm
Box Width	11,5cm
Box Height	9cm
Box Weight	0,316Kg
Pcs/Carton	24
Barcode	5291889043201
HS Code	9405409900

Energy Label

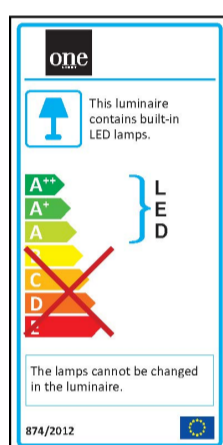

Certification & Warranty

Warranty	2 Years
Average Lifetime	40000hrs
Wee Directive	Yes

switch to
one light!

one
LIGHT

