

19 Wall Recessed & Inground>The COB Inground Adjustable Range

69054A/W



30W COB LED inground IP67, stainless steel 316, adjustable range.

AC LED .


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

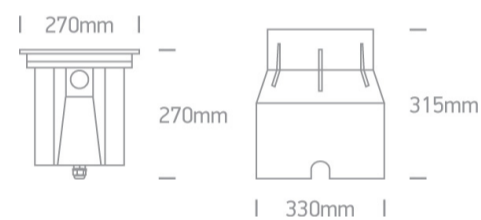

Gallery





Physical Specification

| | |
|-------------------|-----------------------------------|
| Item Group | 19 Wall Recessed & Inground |
| Family | The COB Inground Adjustable Range |
| Order Code | 69054A/W |
| Colour | Stainless Steel |
| Material | Stainless Steel 316 |
| Diffuser Material | Glass |
| Shape | Circular |


| | |
|----------------------|------------------------|
| Height | 270mm |
| Diameter | 270mm |
| Cutout Hole Diameter | 330mm |
| Inground | Yes |
| Depth Required | 330mm + 300mm drainage |
| Indoor | Yes |
| Outdoor | Yes |
| Adjustable | 1 Direction |
| IK Rating | 10 |

Electrical Characteristics

| | |
|------------------|---|
| Gear | No |
| Fitting + Driver | |
| Input Voltage | 100-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 30W |
| IP Rating | IP67 |
| Light Source | LED built in |
| Dimmable | Yes |
| Dimmer type | Triac |
| Cable Length | 200cm |
| F Mark |  |

Illumination Data


| | |
|--------------------|-----------|
| Colour Temperature | 3000K |
| Lumen Output | 2000lm |
| Light Efficiency | 66,67lm/W |

| | |
|----------------------|---|
| CRI | 80 |
| Beam Angle | 20° |
| Illumination Diagram |  |

Packing Info

| | |
|------------|---------------|
| Box Length | 34cm |
| Box Width | 34cm |
| Box Height | 35cm |
| Pcs/Carton | 1 |
| Barcode | 5291889057291 |
| HS Code | 9405409900 |

Energy Label

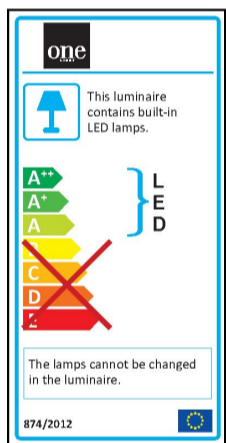

Certification & Warranty

| | |
|----------------|---------|
| Warranty | 2 Years |
| Weee Directive | Yes |

switch to
one light!

one
LIGHT

