




DIMENSIONS



AWARDS



Name	DROP 2 3000K WT
Reference	A1930211WT
Color	Textured white
RAL	9016
Category	CEILING RECESSED

PRODUCT

DROP 2 3000K WT

A1930211WT

Textured white

9016

CEILING RECESSED

Light source	LED
Gross luminous flux	2275 Lm
Power	15,5 W
Power values of the system	17,42 W
Colour temperature	3000 K
Colour Rendering Index	CRI>90
Chromatic stability	Mac Adam Step 2
Light beam angle	98°
Lighting efficiency	86%
Efficacy	147 Lm/W
Current intensity	500 mA
Control through bluetooth	Please Consult
Driver	Included - Connected
Emergency power supply	Please Consult
Electrical insulation class	<input type="checkbox"/>
Voltage	220 V/240 V
Frequency	50/60 Hz
Energy efficiency	A+
LED lifespan	L80B10 (Tc=80°C) >60.000h

LIGHTING INFORMATION

LED

2275 Lm

15,5 W

17,42 W

3000 K

CRI>90

Mac Adam Step 2

98°

86%

147 Lm/W

500 mA

Please Consult

Included - Connected

Please Consult

220 V/240 V

50/60 Hz

A+

L80B10 (Tc=80°C) >60.000h

Ingress Protection	IP43
Impact resistance	IK07
Recess measurements	Ø245 mm.
Weight	1400 g.
Packaged weight	1716,6 g.
Packaging dimensions	334 × 289 × 92 mm.
Units per package	1
Materials	Aluminium / Polymethyl Methacrylate

OTHER DATA

IP43

IK07

Ø245 mm.

1400 g.

1716,6 g.

334 × 289 × 92 mm.


1

Aluminium / Polymethyl Methacrylate




When lit, the lighting of Drop produces an effect of erasing visually the rims of the fitting, creating the illusion of illumination which resembles that of a natural skylight.

POLAR DIAGRAM

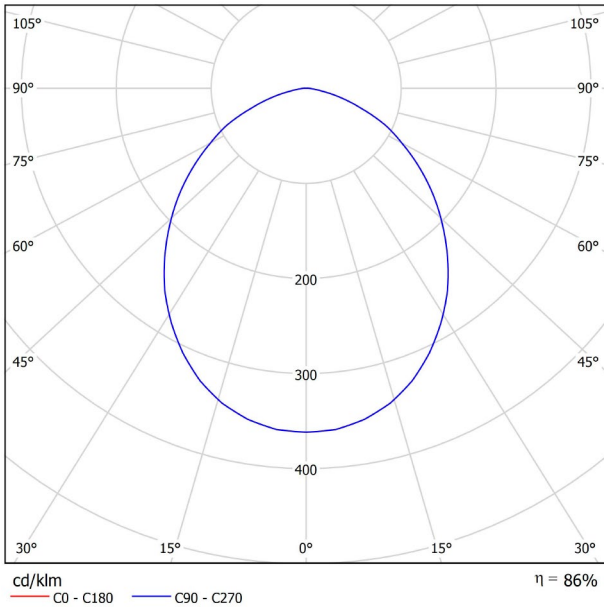

CONICAL DIAGRAM

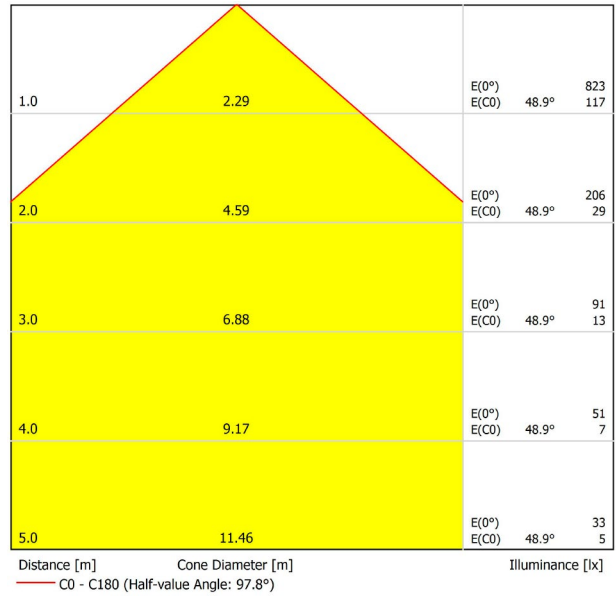

UGR

Glare Evaluation According to UGR											
ρ Ceiling	70	70	50	50	30	70	70	50	50	30	
ρ Walls	50	30	50	30	30	50	30	50	30	30	
ρ Floor	20	20	20	20	20	20	20	20	20	20	
Room Size X    Y		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H	22.1	23.3	22.4	23.6	23.8	22.1	23.3	22.4	23.6	23.8
	3H	23.5	24.6	23.8	24.9	25.1	23.5	24.6	23.8	24.9	25.1
	4H	23.9	24.9	24.2	25.2	25.5	23.9	24.9	24.2	25.2	25.5
	6H	24.0	25.0	24.4	25.3	25.6	24.0	25.0	24.4	25.3	25.6
	8H	24.1	25.0	24.4	25.3	25.6	24.1	25.0	24.4	25.3	25.6
4H	12H	24.1	25.0	24.5	25.3	25.6	24.1	25.0	24.5	25.3	25.6
	2H	22.6	23.7	23.0	23.9	24.2	22.6	23.7	23.0	23.9	24.2
	3H	24.1	25.0	24.5	25.4	25.7	24.1	25.0	24.5	25.4	25.7
	4H	24.6	25.4	25.0	25.8	26.1	24.6	25.4	25.0	25.8	26.1
	6H	24.9	25.6	25.3	25.9	26.3	24.9	25.6	25.3	25.9	26.3
8H	8H	24.9	25.6	25.4	26.0	26.4	24.9	25.6	25.4	26.0	26.4
	12H	25.0	25.5	25.4	25.9	26.4	25.0	25.5	25.4	25.9	26.4
	4H	24.8	25.4	25.2	25.8	26.2	24.8	25.4	25.2	25.8	26.2
	6H	25.1	25.6	25.6	26.0	26.5	25.1	25.6	25.6	26.0	26.5
	8H	25.2	25.6	25.7	26.1	26.6	25.2	25.6	25.7	26.1	26.6
12H	12H	25.3	25.6	25.7	26.1	26.6	25.3	25.6	25.7	26.1	26.6
	4H	24.8	25.3	25.2	25.8	26.2	24.8	25.3	25.2	25.8	26.2
	6H	25.1	25.6	25.6	26.0	26.5	25.1	25.6	25.6	26.0	26.5
8H	25.2	25.6	25.7	26.1	26.6	25.2	25.6	25.7	26.1	26.6	
Variation of the observer position for the luminaire distances S											
S = 1.0H	+0.2 / -0.2					+0.2 / -0.2					
S = 1.5H	+0.3 / -0.6					+0.3 / -0.6					
S = 2.0H	+0.7 / -1.1					+0.7 / -1.1					
Standard table	BK04					BK04					
Correction Summand	4.6					4.6					
Corrected Glare Indices referring to 2275lm Total Luminous Flux											