


LED Mini Driver

Model: SR-4113 series

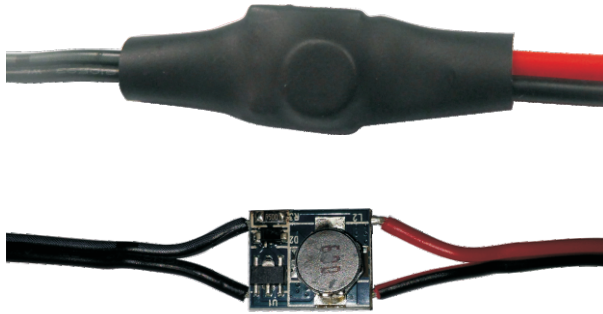


Feature

- Wide input voltage range: 8-24VDC.
- 350Ma constant current output and Max:6*1W load(When Vin=24VDC).
- Withstand a 60V peak voltage for 0.5 secretary.
- Comply with IEC EMC and safety requirement.
- PWM Dimming and Linear Dimming.(optional function)
- Including the inverse-polarity protection.
- Mounting Style: Wired
- An increase of 300-500ms of soft-start time.


Parameter

Part No.	Input Voltage	Current	Output	Remarks
SR-4113	12-24VDC	350mA	9W	Wired
SR-4113S	12-24VDC	700mA	18W	Wired


Product Size

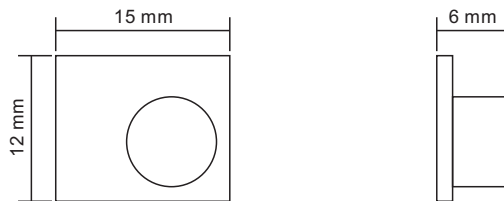

Brief introduction of buttons

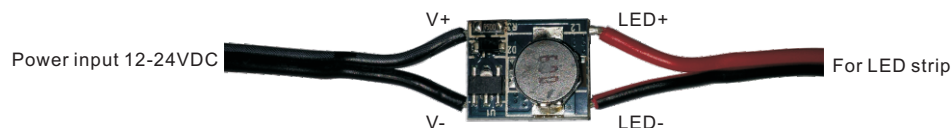

Wiring diagram

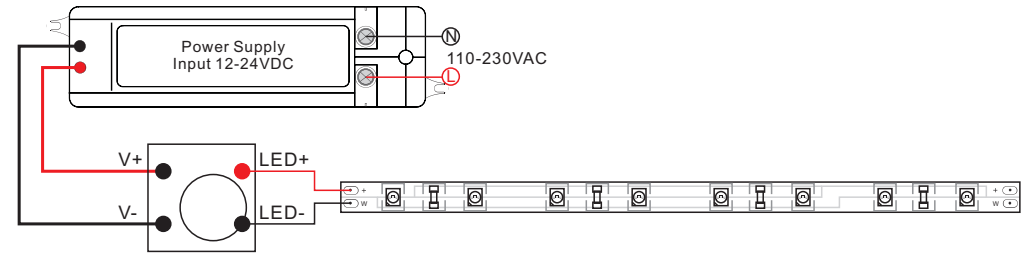

Safety & Warnings

- 1) The product shall be installed and serviced by a qualified person.
- 2) IP20. Please avoid the sun and rain. When installed outdoors, please ensure it is mounted in a water proof enclosure.
- 3) Always be sure to mount this unit in an area with proper ventilation to avoid overheating.
- 4) Please check if the output voltage of any LED power supplies used comply with the working voltage of the product.
- 5) Never connect any cables while power is on and always assure correct connections to avoid short circuits before switching on.
- 6) Please ensure that the cable is secured tightly in the connector
- 7) For update information please consult your supplier.

Warranty Agreement

- 1) We provide lifelong technical assistance with this product:
 - 3-year warranty. We print date on every products, for example :1125 means year 2011, week 25. The warranty is for free repair or replacement and covers manufacturing faults only.
 - For faults beyond the 3-year warranty we reserve the right to charge for time and parts.
- 2) Limited Warranty
 - Any defects caused by wrong operation.
 - Any damages caused by unauthorized removal, maintenance, modifying, incorrect connection and replacement of chips.
 - Any damages due to transportation, vibration etc. after purchase.
 - Any damages caused by earthquake, fire, lightning, pollution and abnormal voltage.
 - Any damages caused by negligence, inappropriate storing at high temperatures and humidity or near harmful chemicals.
 - Product has been updated
- 3) Repair or replacement as provided under this warranty is the exclusive remedy to the customer.