COLORS
Linear Lighting

Version V1.0

# Specification

## Curve Lighting System


## AH5060-15A45/90

www.colorsled.com TEL：+86-755-2923 1888 E-mail：colors@colorsled.com

Version V1.0

# AH5060-15A45/90




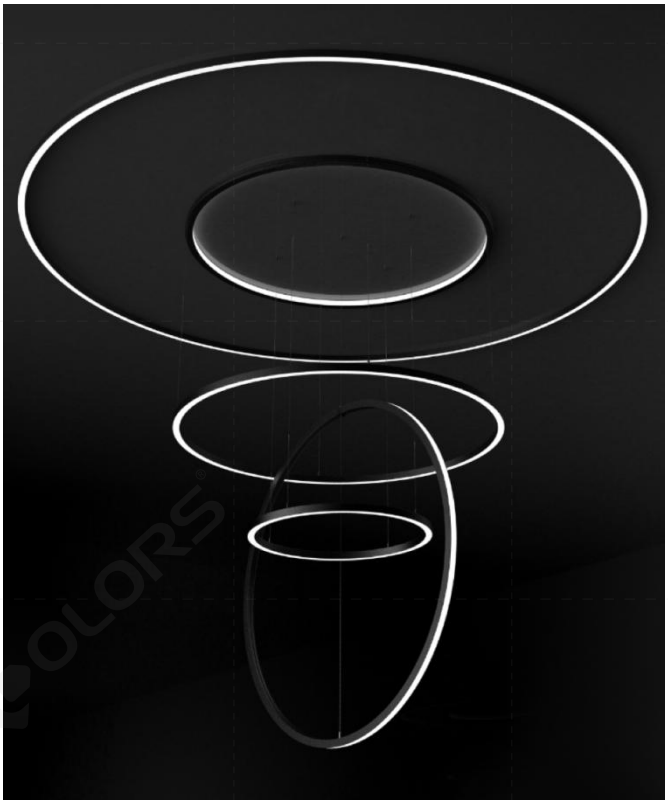






## Features




- Lighting direction : Lighting upward and downward
- Various installation ways: pendant, surface mounted
- Specially designed light source with diffusers producing homogeneous and soft lighting
- Ever-changing shapes generated by means of super free application and connections of lines and arcs
- Flexible diffuser making it easy for installation without connections for over length application and light leakage
- AL6063-T5 aluminum profile with high-quality surface treatment and three optional colors of black, white and silver

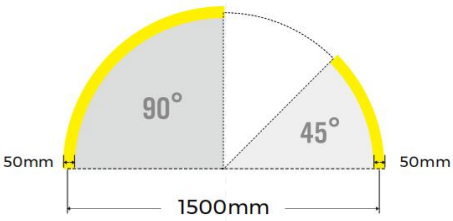



www.colorsled.com TEL：+86-755-2923 1888 E-mail：colors@colorsled.com

## Details





## Optional Accessories


| Picture | Item | Parameter | Model |
|---|---|---|---|
|  | ①Profile | Profile weight：0.7kg / D1500mm，45°<br>Size：50x60mm，D1500mm，45<br>50x60mm，D1500mm，90°<br>Material：AL6063-T5<br>Surface processing: Spray | AH5060-15A45/ 90 |
|  | ②/③Cover | ②35 cover Size：L20000*W32*H3.5mm<br>③50 cover Size：L20000*W47*H4mm<br>Light transmittance: 60% | ②CV-AS3535FD<br>③CV-AH5060FD |
|  | ④End cap | Size：L60*W50*H2mm | EC-AH5060 |
|  | ⑤Rigid modular<br>DY8160-24V-20mm-15A45 | Material:AL,CCT:<br>2700/3000/3500/4000/5000/6500K；CRI＞80/90；<br>Voltage：24V；Power： 11.6W/pcs；Lumen：<br>1740Lm/m；Width：20mm；Minimum cutting unit：<br>16LEDs； | DY8160-24V-<br>20mm-15A45 |
|  | Screw set<br>CL-15 | Size：M3.5*50mm | CL-15 |

| Picture | Item | Parameter | Model |
|---|---|---|---|
|  | Pendant cable | Steel cable： D1.5*2000\4000mm\maximum load bearing:13Kg | PN-W |
|  | Pendant cable | / | PE-C |
|  | Splicing bar | Size：L25*W32*H8.5mm | EX-25 |
|  | Pendant clips | Size：L39.5*W20*H12mm | CP-29 |

## Optical Parameter

AH5060-15A45 module/DY8160-24V-20mm-15A45 light source, frosted diffuser

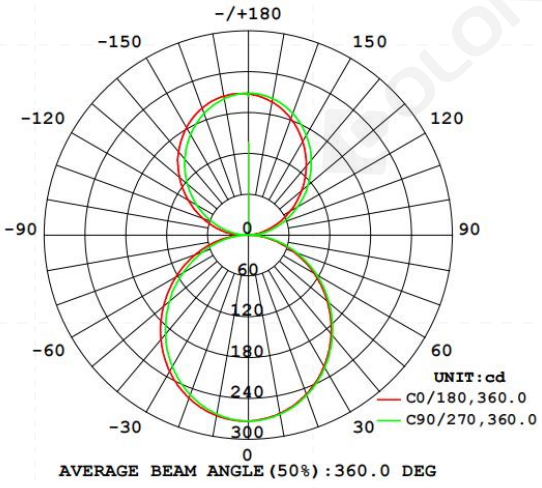
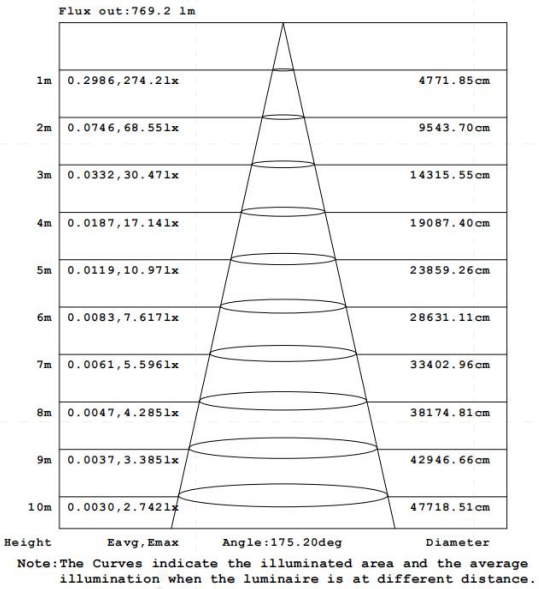
# Package



| Components | Packaging material | Size(mm) | NW(kg) | GW(kg) | Content |
|---|---|---|---|---|---|
| 15A45 | Hat box | 675*320*185mm | 8.4 | 11.4 | 12pcs/box |
| 15A90 | Hat box | 1180*515*185mm | 21.96 | 24.96 | 12pcs/box |