




Product Datasheet

14 Wall & Ceiling LED>The COB Adjustable Decorative Spot

65107/W/W

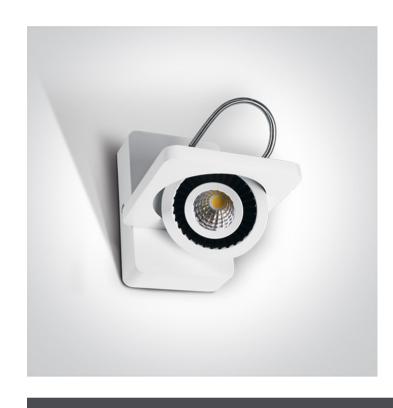

7W COB LED adjustable ceiling downlight, ideal for residential and commercial illumination.

Complete with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads







Dimensions

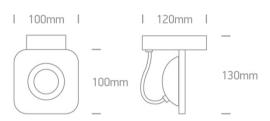

Gallery



Physical Specification


Item Group	14 Wall & Ceiling LED
Family	The COB Adjustable Decorative Spot
Order Code	65107/W/W
Colour	White
Material	Aluminium
Shape	Rectangular
Length	100mm

Width	120mm
Height	130mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
Gear	
	Built In
Fitting + Driver	Built In
	Built In 100-240V
Fitting + Driver	
Fitting + Driver Input Voltage	100-240V
Fitting + Driver Input Voltage 50 Hz	100-240V Yes
Fitting + Driver Input Voltage 50 Hz 60 Hz	100-240V Yes

Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	9V
Power(Watts)	6,3W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Cree

Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,1-7W
Power Factor	0,9
Constant Current	Yes
700mA	3-10V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Manufacturer	Eaglerise
Illumination Data Colour Temperature	3000K
Colour Temperature	3000K 594lm
Colour Temperature Lumen Output	594lm
Colour Temperature	
Colour Temperature Lumen Output Light Efficiency	594lm 84,85lm/W
Colour Temperature Lumen Output Light Efficiency CRI	594lm 84,85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	594lm 84,85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	594lm 84,85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	594lm 84,85lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	594lm 84,85lm/W 80 35°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	594lm 84,85lm/W 80 35° 12,5cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	594lm 84,85lm/W 80 35° 12,5cm 13,5cm
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width Box Height	594lm 84,85lm/W 80 35° 12,5cm 13,5cm 10,5cm

Energy Label



Certification & Warranty

Warranty 2 Years

Weee Directive Yes

switch to one light!

